


# High Speed HDMI Cable with Ethernet (0.3 m / 0.6 m)

## 2L-7DA3H / 2L-7DA6H


- ATEN High Speed HDMI Cable with Ethernet provides an uncompressed, all-digital interface for both audio and video signals, guaranteeing reliable digital signal transmission up to 4K (4096 x 2160 / 3840 x 2160 @ 30 Hz). Our cables infuse high-quality tinned copper wire to resist interference for better-defined video and image quality.

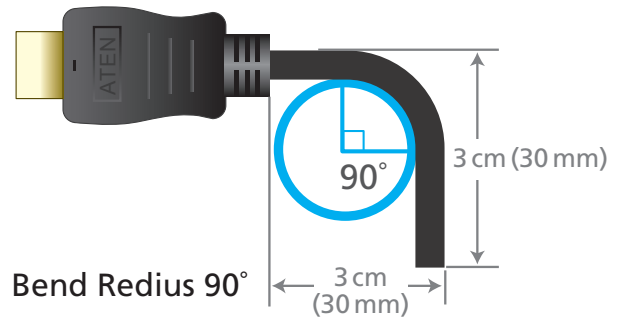

### Specifications

Function	2L-7DA3H	2L-7DA6H
<b>Video Resolution</b>	Up to 4096X2160 @ 30Hz	
<b>Physical Properties</b>		
Cable Length	0.3 m	0.6 m
Cable Color	Black	
Cable Outer Dimension	6.0 +/- 0.15mm	
Conductor Gauge	30AWG	
Conductor Material	Tinned Copper	
Connector Plating	Gold	
Connector Type	HDMI (19 pin) Male to Male	
Cable Shield Type	Aluminum Foil	
Cable Jacket Type	PVC	
<b>Environmental</b>		
Operating Temperature	80°C	
Rating	UL VW-1 (Flame rate), CSA	

Part No.	Length
2L-7DA3H	0.3 m
2L-7DA6H	0.6 m



Gold-plated connectors

### Features

- Optimum signal transmission up to 4K (4096 x 2160 / 3840 x 2160 @ 30 Hz) and standard 1920 x 1080 @ 60 Hz
- HDMI Ethernet Channel functionality: additional dedicated data channel supports networking\*
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compliant
- Gold-plated connectors for reliable transmissions
- Available in 0.3 and 0.6 m
- Bend Radius 90° \*\*

**Note:**

\* Feature only available if linked devices are HDMI Ethernet Channel enabled

\*\* Swings 100 times between angles of +/- 90 degrees, at a frequency of 13 times per minute

