


MUSICAL INSTRUMENTAL CABLE

CVS LK01N6S2

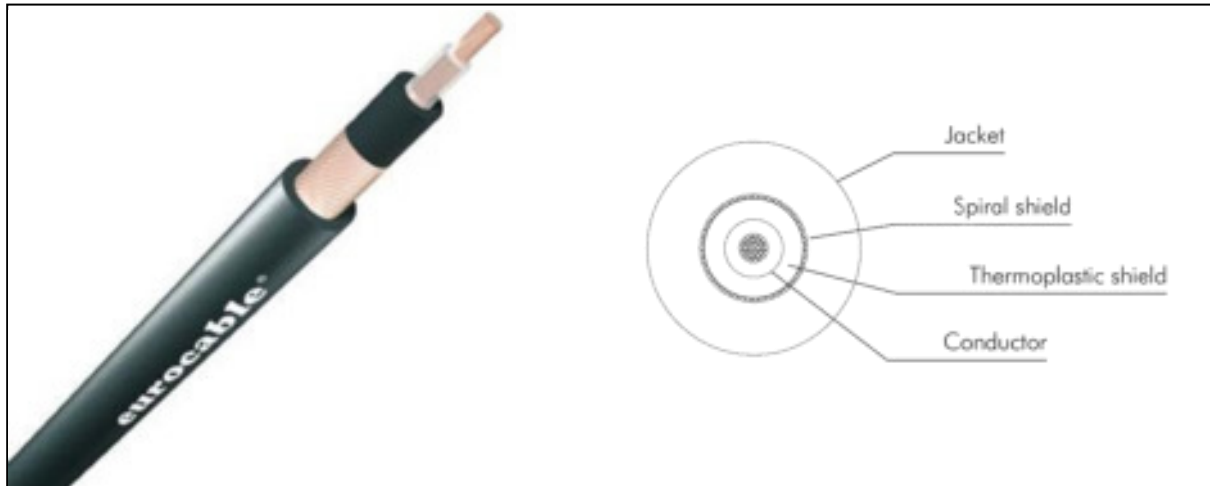

CVS LK01N6S2		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	≤ 78 ohm/km
	Shield	≤ 50 ohm/km
Capacitance	Conductor/Conductor 1 KHz	-
	Conductor/Shield 1 KHz	130 pF/m
Nominal Impedance 1 KHz		360 ohm/100m
Attenuation 1 KHz		0.25 db/100m
Inductance		< 16 μH/100m
GENERAL DATA		
Cable	O.D.	6.00 mm
	Standard reels	100 m
	Weight Kg/100m	3.50
	Operating temperature	-5°C/+70°C
Jacket	Material	PVC
	Nominal Thickness	1.70 mm
Shield (double)	Material	First: Conductive graphite - Second: Spiral bare copper shield
	Coverage	First: 100% - Second: 95%
Conductor	Qty	1
	Strand	30 x 0.10 mm
	Area/AWG	0.22 mm ² /24
	Insul. O.D.	1.70 mm
	Material	Bare copper polyethylene insulated