

# SHURE®

LEGENDARY  
PERFORMANCE™

Microflex Microphones



# MICROFLEX MICROPHONES

THERE'S NEVER BEEN A MORE FLEXIBLE CHOICE.

Work a room in more ways than ever with Shure Microflex microphones. Combining sleek, low profile aesthetics and a complete selection of microphones and mounting options, the Microflex line offers the highest standard of quality and efficiency for installed audio applications.

## Microflex Gooseneck Microphones

- 12 cm (5"), 25 cm (10"), 30 cm (12"), 38 cm, (15") and 45 cm (18") models fit a wide variety of applications from the podium to the conference table
- Interchangeable condenser cartridges with superior audio quality

## Microflex Boundary Microphones

- Multi-element, low-profile, or wireless microphone styles available
- Extremely versatile range of placement options for easy configuration and installation

## Microflex Overhead Microphones

- Compact and adjustable 10 cm (4") gooseneck
- Interchangeable condenser cartridges for accurate sound reproduction in any setting

## Microflex Lavalier and Earset Microphones

- For applications requiring low-profile discreet placement
- Use in wired or wireless applications

### APPLICATIONS

Conference Rooms

Seminars

Houses of Worship

Theaters

Lecterns

### PRODUCT HIGHLIGHTS

Wide selection for  
customized installations

Wired or wireless  
models available

Superior audio quality

CommShield™  
Technology for  
improved RF resistance

Sleek, low-profile  
designs





# MX405, MX410 and MX415 Miniature Gooseneck Microphones

Flexible in more ways than one, Microflex Miniature Gooseneck Microphones deliver unsurpassed style and performance for conference rooms and similar applications. Offering desktop or mounted bases, wired or wireless options, and even interchangeable cartridges, it's easy to get the perfect fit for your application. Fully compatible with SLX® Wireless Systems, Microflex Wireless Systems and ULX-D Systems.

## Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	MX405/C, MX410/C, MX415/C: Cardioid MX405/S, MX410/S, MX415/S: Supercardioid
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Output Configuration	Active balanced
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (18 mV) Supercardioid: -34 dBV/Pa (21 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	Cardioid: 121 dB Supercardioid: 120 dB
Equivalent Output Noise A-weighted	Cardioid: 28 dB SPL Supercardioid: 27 dB SPL
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Supercardioid: 67 dB
Dynamic Range 1 kΩ load at 1 kHz	93 dB
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Preamplifier Output Clipping Level 1% THD	-8 dBV (0.4 V)
Polarity	3-Pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector. 5-Pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 4 relative to pin 2 of output XLR connector.
Weight	MX405: 54 g MX410: 68 g MX415: 70 g MX400DP: 516 g MX400SMP (w/ Kit): 125 g
Logic Connections	LED IN: Active low ( $\leq 1.0$ V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V. LOGIC OUT: Active low ( $\leq 1.0$ V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).
Mute Switch Attenuation	-50 dB minimum
Cable	MX400DP: 6 m attached cable with shielded audio pair terminated at a 3-pin male XLR and three unterminated conductors for logic control
Environmental Conditions	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
Power Requirements	48 – 52 Vdc phantom, 8.0 mA

\*for detailed dimensions please reference MX405/410/415 user guide

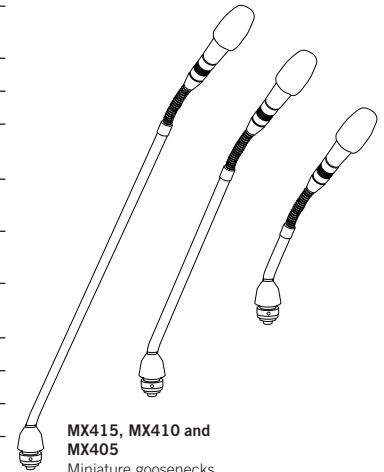

## Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

MX405/C, MX405/S	127 mm (5 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX405R/N	127 mm (5 inch) gooseneck, light ring, includes surface mount preamp
MX410/C, MX410/S	254 mm (10 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX410R/N	254 mm (10 inch) gooseneck, light ring, includes surface mount preamp
MX415/C, MX415/S	381 mm (15 inch) gooseneck, bi-color status indicator, includes surface mount preamp
MX415R/N	381 mm (15 inch) gooseneck, light ring, includes surface mount preamp
MX405LP/C, MX405LP/S	127 mm (5 inch) gooseneck, bi-color status indicator, less preamp
MX405RLP/N	127 mm (5 inch) gooseneck, light ring, less preamp
MX410LP/C, MX410LP/S	254 mm (10 inch) gooseneck, cardioid, bi-color status indicator, less preamp
MX410RLP/N	254 mm (10 inch) gooseneck, light ring, less preamp
MX410LPDF/C, MX410LPDF/S	254 mm (10 inch) gooseneck, bi-color status indicator, less preamp, dualflex
MX410RLPDF/C, MX410RLPDF/S	254 mm (10 inch) gooseneck, light ring, less preamp, dualflex
MX410RLPDF/N	254 mm (10 inch) gooseneck, light ring, less preamp, dualflex
MX415LP/C, MX415LP/S	381 mm (15 inch) gooseneck, cardioid, bi-color status indicator, less preamp
MX415RLP/N	381 mm (15 inch) gooseneck, light ring, less preamp
MX415LPDF/C, MX415LPDF/S	381 mm (15 inch) gooseneck, bi-color status indicator, less preamp, dualflex
MX415RLPDF/C, MX415RLPDF/S	381 mm (15 inch) gooseneck, light ring, less preamp, dualflex
MX415RLPDF/N	381 mm (15 inch) gooseneck, light ring, less preamp, dualflex





# MX405, MX410 and MX415 Miniature Gooseneck Microphones

## Optional Accessories and Replacement Parts

<b>MX400SMP</b>	Surface mount preamp	<b>R185B</b>	Black cardioid cartridge for all Microflex models	<b>A412MWS</b>	Metal locking windscreen
<b>MX400DP</b>	Wired desktop base. Includes 6.1 m attached cable	<b>R184B</b>	Black supercardioid cartridge for all Microflex models	<b>95A2487</b>	Tapered windscreen
<b>MX890</b>	Wireless desktop base, compatible with SLX Wireless Systems	<b>R183B</b>	Black Omnidirectional cartridge for all Microflex models		

## Furnished Accessories

Models with included Preamp	All Models
<b>MX400SMP</b> Surface mount preamp	<b>RK513WS</b> Snap-fit foam windscreen (4 pcs.)
<b>65A405</b> Rubber isolation rings	
<b>65A2190</b> Wing nut	
<b>95A2529</b> 5-pin XLR-F	
<b>65A2166</b> Cap	

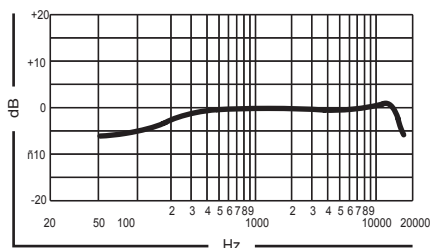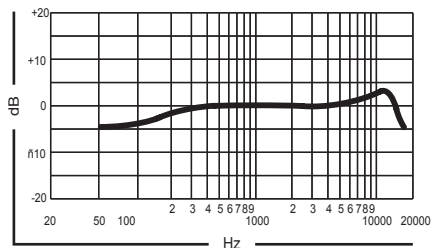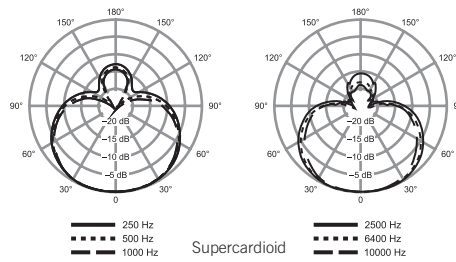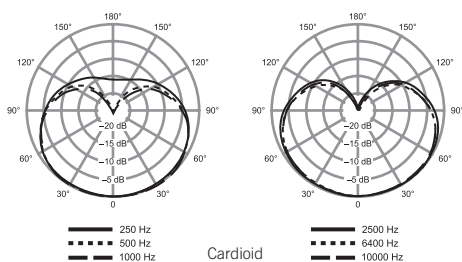

## Architectural Specifications

**MX405/C** – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with cardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 18 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX405/S** – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with supercardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX405R/N** – The microphone shall be an electret condenser 127 mm gooseneck microphone (5") with no included cartridge, black finish, and logic controlled, upper red light ring status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX410/C** – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with cardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 18 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX410/S** – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with supercardioid polar pattern, black finish, and logic controlled bi-color status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX410R/N** – The microphone shall be an electret condenser 254 mm gooseneck microphone (10") with no included cartridge, black finish, and logic controlled, upper red light ring status indicator. The microphone shall be mounted in the included MX400SMP preamp. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.




# MX412 and MX418 Standard Gooseneck Microphones

Microflex Standard Gooseneck Microphones provide the added length and flexibility needed for speakers in environments like lecterns, pulpits, and courtrooms. Available in four models with a variety of lengths and mounting styles to choose from, Microflex Gooseneck microphones feature high sensitivity and balanced, transformerless output for maximum resistance to electromagnetic hum and RF interference, even over long cable runs.


## Specifications

<b>Type</b>	Condenser (electret bias)
<b>Frequency Response</b>	50 Hz – 17 kHz
<b>Polar Pattern</b>	MX412/C, MX418/C: Cardioid MX412/S, MX418/S: Supercardioid Omnidirectional cartridge available separately
<b>Output Impedance</b>	EIA rated at 150 Ω (170 Ω actual)
<b>Sensitivity</b> at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (17.8 mV) Supercardioid: -33.5 dBV/Pa (21.1 mV) Omnidirectional: -27.5 (42.2 mV)
<b>Maximum SPL</b> 1 kHz at 1% THD, 1 kΩ load	Cardioid: 124.2 dB Supercardioid: 122.7 dB Omnidirectional: 116.7 dB
<b>Equivalent Output Noise</b> A-weighted	Cardioid: 28 dB SPL Supercardioid: 26.5 dB SPL Omnidirectional: 20.5 dB SPL
<b>Signal-to-Noise Ratio</b> referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Supercardioid: 67.5 dB Omnidirectional: 73.5 dB
<b>Dynamic Range</b> 1 kΩ load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
<b>Common Mode Rejection</b>	45 dB minimum (10 Hz – 100 kHz)
<b>Preamplifier Output Clipping Level</b> 1% THD	-6 dBV (0.5 V)
<b>Polarity</b>	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector.
<b>Mute Switch Attenuation</b>	-50 dB minimum
<b>Cable</b>	MX412D and MX418D: The 3 m attached custom cable contains a shielded audio pair and three unshielded conductors for logic control. Overall diameter = 4 mm
<b>Environmental Conditions</b>	Operating temperature range: -18° – 57° C Relative humidity: 0 – 95%
<b>Power Requirements</b>	11 – 52 Vdc phantom, 8.0 mA

\*for detailed dimensions please reference MX412/418 user guides

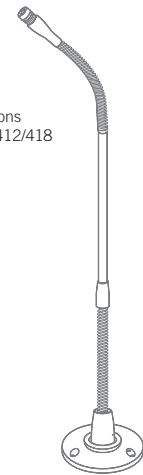

**MX418**  
Gooseneck with attached preamp and shock mount

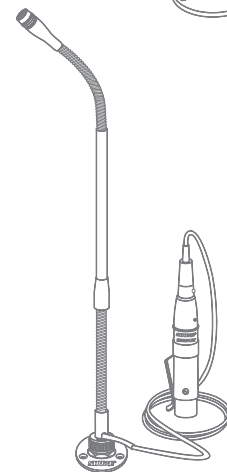

**MX418SE**  
Gooseneck with in-line preamp and side exit cable

## Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

<b>MX412/C, MX412/S, MX412/N</b>	305 mm (12 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen
<b>MX418/C, MX418/S, MX418/N</b>	457 mm (18 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen
<b>MX412S/C, MX412S/S, MX412S/N</b>	305 mm (12 inch) gooseneck, attached XLR preamp, Shock Mount, flange mount, snap-fit foam windscreen, mute switch, LED Indicator
<b>MX418S/C, MX418S/S, MX418S/N</b>	457 mm (18 inch) gooseneck, attached XLR preamp, shock mount, flange mount, snap-fit foam windscreen, mute switch, LED indicator
<b>MX412SE/C, MX412SE/S, MX412SE/N</b>	305 mm (12 inch) gooseneck, in-line preamp, shock mount, flange mount, 3 m side-exit (or bottom-exit) cable, snap-fit foam windscreen
<b>MX418SE/C, MX418SE/S, MX418SE/N</b>	457 mm (18 inch) gooseneck, in-line preamp, shock mount, flange mount, 3 m side-exit (or bottom-exit) cable, snap-fit foam windscreen
<b>MX412D/C, MX412D/S, MX412D/N</b>	305 mm (12 inch) gooseneck, desktop base with 3 m cable, logic functions, programmable switch and LED indicator, snap-fit foam windscreen
<b>MX418D/C, MX418D/S, MX418D/N</b>	457 mm (18 inch) gooseneck, desktop base with 3 m cable, logic functions, programmable switch and LED indicator, snap-fit foam windscreen



**MX412D**  
Gooseneck with attached desktop base




# MX412 and MX418 Standard Gooseneck Microphones

## Furnished Accessories

MX412, MX418, MX412S, MX418S Models		MX412SE, MX418SE Models		MX412D, MX418D Models	
65B8264	Flange	A12C	Flange and nut	RK412WS	Snap-fit foam windscreen (1 furnished, 4 in replacement pack)
65B8265	Retainer	80A476	Clamp		
80A439	Isolation ring	A400SM	Shock mount		
RK412WS	Snap-fit foam windscreen (1 furnished, 4 in replacement pack)	RK412WS	Snap-fit foam windscreen (1 furnished, 4 in replacement pack)		
A400SM	Shock mount	31B1762A	Shock mount adapter		
80A67	Hex wrench #4				

## Optional Accessories and Replacement Parts

A99WS	Foam ball windscreen	R183B	Black omnidirectional cartridge for all Microflex models	A412MWS	Metal locking windscreen
RK100PK	Replacement in-line preamplifier (SE models)	R184B	Black supercardioid cartridge for all Microflex models	A412B	Desktop base
C130	Custom logic cable (specify length)	R185B	Black cardioid cartridge for all Microflex models	A57F	Stand adapter

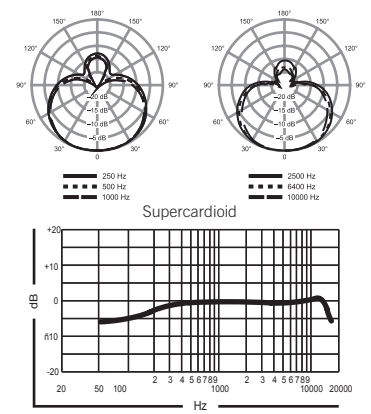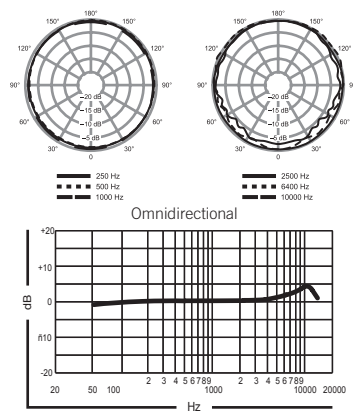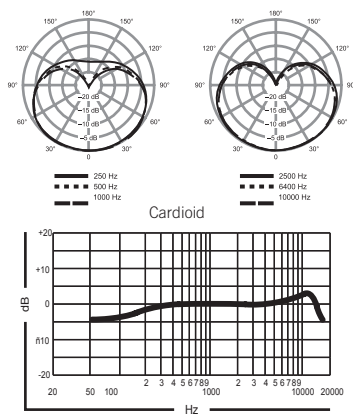



# MX396 Multi-Element Boundary Microphones



Microflex Multi-Element Boundary Microphones deliver a unique and versatile tool for conference room installations. Clean and simple in appearance, Multi-Element Boundary mics come in two or three element configurations, combining the coverage of multiple microphones into one small, compact package.

## Specifications

Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Output Impedance	EIA rated at 150 Ω (170 Ω actual)
Output Configuration	Active balanced
Sensitivity at 1 kHz, open circuit voltage; 1 Pa = 94 dB SPL	-35 dBV/Pa (18 mV)
Maximum SPL 1 kHz at 1% THD, 1 kΩ load	122 dB
Equivalent Output Noise A-weighted	28 dB SPL
Signal-to-Noise Ratio referenced at 94 dB SPL at 1 kHz	66 dB
Dynamic Range 1 kΩ load at 1 kHz	94 dB
Common Mode Rejection 10 Hz to 100 kHz	45 dB minimum
Preamplifier Output Clipping Level 1% THD	-6 dBV (0.5 V)
Weight	Net: 587 g Packaged: 816 g
Logic Connections	LED IN: Active low ( $\leq 1.0$ V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ). LOGIC OUT: Active low ( $\leq 1.0$ V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).
Mute Switch Attenuation	-50 dB minimum
Cable	6 m attached unterminated cable with three shielded audio pairs and three shielded conductors for logic control.
Environmental Conditions	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
Power Requirements	MX396/C-DUAL: 48 – 52 Vdc phantom, 10.0 mA MX396/C-TRI: 48 – 52 Vdc phantom, 12.0 mA



MX396 Multi-Element boundary microphone

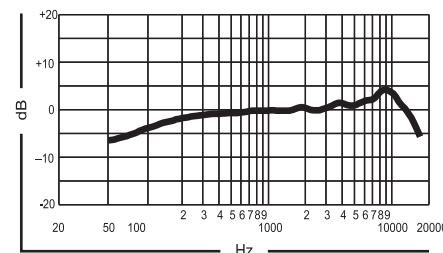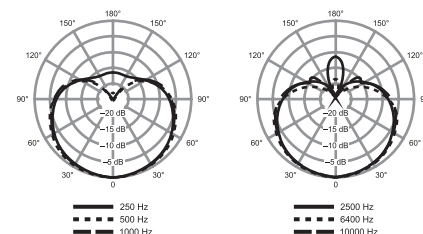

## Available Models

MX396/C-DUAL	Dual-Element 0-180 degrees, back or bottom exit cable, mute output, LED input
MX396/C-TRI	Tri-Element 90-0-90 mic, adjustable to 120-120-120 degrees, back or bottom exit cable, mute output, LED input

## Furnished Accessories and Replacement Parts


65A2190	Fastening wingnut	R185B	Cardioid replacement cartridge (x 1)
31A2165	Fastening tube	65A405	Rubber isolation rings

## Architectural Specifications


**MX396/C-Dual** – The microphone shall be a surface mounted, black electret condenser microphone with two cardioid polar pattern elements, each with individual channel output. The microphone shall include a logic enabled, bi-color status indicator and programmable mute switch. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity of each individual element, 18 mV/Pa.

**MX396/C-Tri** – The microphone shall be a surface mounted, black electret condenser microphone with three cardioid polar pattern elements, each with individual channel output. The microphone shall include a logic enabled, bi-color status indicator and programmable mute switch. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity of each individual element, 18 mV/Pa.

Cross-Table Coverage (Dual) End-Of-Table Coverage (Tri) Center-Of-Table Coverage (Tri)

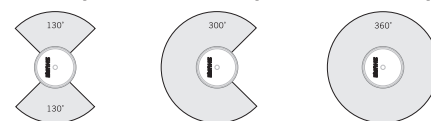

Example of Boardroom Table Mic Placement Coverage






# MX395 Low Profile Boundary Microphones

The Microflex Low Profile Boundary Microphone is an ideal table microphone when minimal presence is of high priority. Perfect for meeting rooms, these microphones deliver exceptional sound pickup while barely being noticed. Choose from a selection of colors and pickup patterns for customized table and ceiling installations.

## Specifications

<b>Type</b>	Condenser (electret bias)
<b>Frequency Response</b>	50 Hz – 17 kHz
<b>Polar Pattern</b>	MX395/O: Omnidirectional MX395/C: Cardioid MX395/BI: Bidirectional
<b>Output Impedance</b>	EIA rated at 150 Ω (170 Ω actual)
<b>Output Configuration</b>	Active balanced
<b>Sensitivity</b> at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	Cardioid: -35 dBV/Pa (18 mV) Omnidirectional: -28 dBV/Pa (42 mV) Bidirectional: -37 dBV/Pa (14 mV)
<b>Maximum SPL</b> 1 kHz at 1% THD, 1 kΩ load	Cardioid: 121 dB Omnidirectional: 114 dB Bidirectional: 123 dB
<b>Equivalent Output Noise</b> A-weighted	Cardioid: 28 dB SPL Omnidirectional: 21 dB SPL Bidirectional: 29 dB
<b>Signal-to-Noise Ratio</b> referenced at 94 dB SPL at 1 kHz	Cardioid: 66 dB Omnidirectional: 73 dB Bidirectional: 65 dB
<b>Dynamic Range</b> 1 kΩ load at 1 kHz	Cardioid: 93 dB Omnidirectional: 93 dB Bidirectional: 94 dB
<b>Common Mode Rejection</b>	45 dB minimum 10 Hz to 100 kHz
<b>Preamplifier Output Clipping Level</b> 1% THD	-8 dBV (0.4 V)
<b>Polarity</b>	3-pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector. 5-pin XLR: Positive sound pressure on diaphragm produces positive voltage on pin 4 relative to pin 2 of output XLR connector.
<b>Weight</b>	Net: 136 g; Packaged: 374 g
<b>Logic Connections</b>	LED IN: Active low ( $\leq 1.0$ V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V.
<b>Environmental Conditions</b>	Operating temperature: -18 – 57 °C Storage temperature: -29 – 74 °C Relative humidity: 0 – 95%
<b>Power Requirements</b>	MX395: 11 – 52 Vdc phantom, 2.0 mA MX395-LED: 48 – 52 Vdc phantom, 8.0 mA

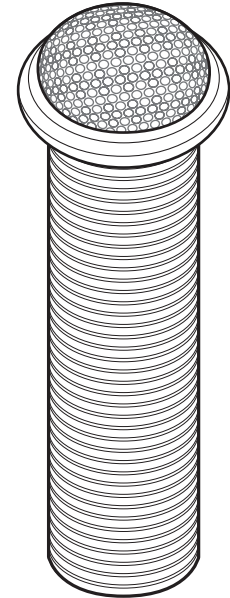

**MX395**  
Low Profile  
Boundary Mic

## Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, O = Omnidirectional, BI = Bidirectional

<b>MX395B/C, MX395B/BI, MX395B/O</b>	Black, 3-pin XLR
<b>MX395AL/C, MX395AL/BI, MX395AL/O</b>	Aluminum, 3-pin XLR
<b>MX395W/C, MX395W/BI, MX395W/O</b>	White, 3-pin XLR
<b>MX395B/C-LED, MX395B/BI-LED, MX395B/O-LED</b>	Black, 5-pin XLR, LED, bi-color status indicator
<b>MX395AL/C-LED, MX395AL/BI-LED, MX395AL/O-LED</b>	Aluminum, 5-pin XLR, LED, bi-color status indicator
<b>MX395W/C-LED, MX395W/BI-LED, MX395W/O-LED</b>	White, 5-pin XLR, LED, bi-color status indicator





# MX690 Wireless Boundary and MX890 Wireless Desktop Base

The Microflex Wireless Boundary Microphone as well as the Wireless Desktop Base offer total freedom of placement with no holes to drill or cables to run for installation. They are the perfect solution for conference and meeting spaces where users demand flexibility and high performance. Compatible with Shure SLX Wireless Systems, including the SLX4L receiver with logic signal output for applications requiring logic functionality.

## Specifications

MX690 Microphone Specifications	
Type	Condenser (electret bias)
Frequency Response	50 Hz – 17 kHz
Polar Pattern	Cardioid
Sensitivity at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL	-33 dBV/Pa (22 mV)
Dynamic Range	96 dB 1 kΩ load at 1 kHz
Common Mode Rejection	45 dB minimum 10 Hz to 100 kHz
Preamplifier Output Clipping Level 1% THD	-6 dBV (0.5 V)
Polarity	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector or tip of 1/4" phone plug (both on SLX4 or SLX4L wireless receiver).
MX690 and MX890 Transmitter Specifications	
RF Power	10 mW
Operating Range	30 m Note: Actual range depends on RF signal absorption, reflection, and interference
Frequency Stability	±10 ppm
Maximum Frequency Deviation	45 kHz
Oscillator Type	Phase-locked loop (PLL) controlled synthesizer
Power Requirements	3 V (2 AA alkaline or rechargeable batteries)
Battery Life	≥8 hours (alkaline)
Power Consumption	130 mA, ± 15 mA
Operating Temperature Range	-18 – 57 °C Note: Battery may limit this range
Dimensions (H x W x L)	43 mm x 87 mm x 148 mm
Weight	<b>MX690</b> Net: 318 g Packaged: 516 g <b>MX890</b> Net: 312 g Packaged: 530 g
MX690 Net: 318 g (11,2 oz)	

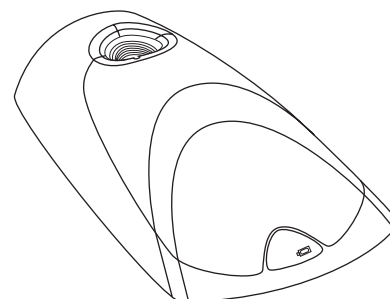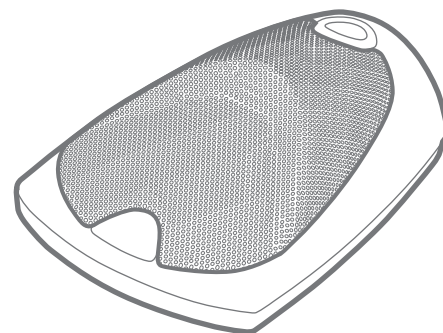

**MX890**  
Wireless Desktop Base

## Available Models

<b>MX690</b>	Wireless boundary microphone, cardioid, mute switch
<b>MX890</b>	Wireless desktop base for MX405 and MX410 models, mute switch


## Optional Accessories

<b>SLX4</b>	Wireless diversity receiver	<b>SLX4L</b>	Wireless diversity receiver with logic output
-------------	-----------------------------	--------------	---

## Architectural Specifications

**MX690** – The microphone shall be a surface mounted, black condenser microphone with a cardioid polar pattern. The microphone shall include a bi-color LED status indicator and a programmable mute switch. The microphone shall have an integrated wireless transmitter for audio signals with switchable carrier frequencies as well as preprogrammed groups up to 12 compatible channels. An infrared signal shall be used to synchronize the frequency between transmitter and receiver. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency range shall be 50 Hz to 17 kHz and the sensitivity shall be 22 mV/Pa.

**MX890** – The wireless desk stand shall be a transmitter base for audio signals with switchable carrier frequencies as well as preprogrammed groups with up to 12 compatible channels. An infrared signal shall be used to synchronize the frequency between transmitter and receiver. The wireless desktop base shall be used with the MX405 and MX410 series gooseneck microphones and shall feature a programmable mute switch.

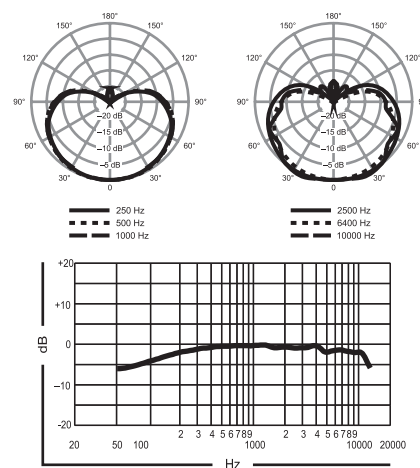

# MX202 Overhead Microphones

Easily hung from ceilings, Microflex Overhead Microphones capture sound from speakers, choirs, stages, and more conveniently and unobtrusively from above. Compact and flexible, overhead microphones each feature a 10 cm (4") gooseneck, multiple preamp options for easy installation into ceilings or microphone stands, and versatile condenser cartridges for accurate sound reproduction in any setting.


## Specifications

<b>Type</b>	Condenser (electret bias)
<b>Frequency Response</b>	50 Hz – 17 kHz
<b>Polar Pattern</b>	MX202/C: Cardioid MX202/O: Omnidirectional MX202/S: Supercardioid
<b>Output Impedance</b>	150 $\Omega$ rated at EIA (180 $\Omega$ actual)
<b>Sensitivity</b> (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL)	Cardioid: -35.0 dBV/Pa (17.8 mV) Supercardioid: -33.5 dBV/Pa (21.1 mV) Omnidirectional: -27.5 dBV/Pa (42.2 mV)
<b>Maximum SPL</b> (1 kHz at 1% THD, 1 k $\Omega$ load; All values +6 dB at 0 gain)	Cardioid: 124.2 dB Supercardioid: 122.7 dB Omnidirectional: 116.7 dB
<b>Equivalent Output Noise</b> A-weighted	Cardioid: 28.0 dB SPL Supercardioid: 26.5 dB SPL Omnidirectional: 20.5 dB SPL
<b>Signal to Noise Ratio</b> (referenced at 94 dB SPL)	Cardioid: 66.0 dB Supercardioid: 67.5 dB Omnidirectional: 73.5 dB
<b>Dynamic Range</b> 1 k $\Omega$ load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
<b>Common Mode Rejection</b> 10 Hz to 100 kHz	45 dB minimum
<b>Preamplifier Output Clipping Level</b> 1% THD	-6 dBV (0.5 V)
<b>Polarity</b>	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output connector.
<b>Power Requirements</b>	11 – 52 Vdc phantom, 2.0 mA
<b>Environmental Requirements</b>	Operating temperature range: -18° C – 57° C Relative humidity: 0 – 95%

## Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, S = Supercardioid, N = No Cartridge

<b>MX202B/C, MX202B/S, MX202B/N</b>	Black mini-condenser microphone; includes cable, in-line preamplifier, and stand adapter
<b>MX202W/C, MX202W/S, MX202W/N</b>	White mini-condenser microphone; includes cable, in-line preamplifier, and stand adapter
<b>MX202BP/C, MX202BP/S, MX202BP/N</b>	Black mini-condenser microphone; includes cable and plate-mounted preamplifier
<b>MX202WP/C, MX202WP/S, MX202WP/N</b>	White mini-condenser microphone; includes cable and plate-mounted preamplifier

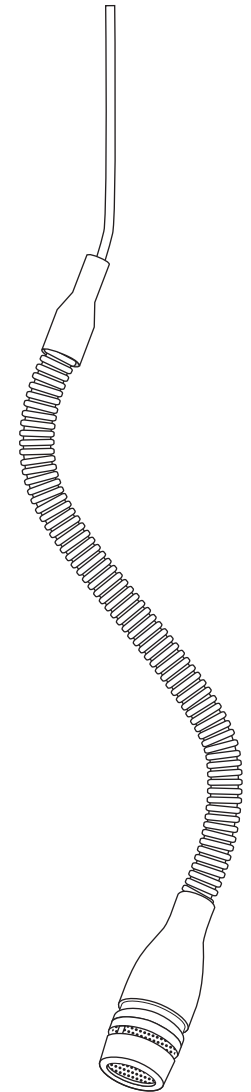

**MX202**  
Overhead Microphone

# MX202 Overhead Microphones

## Furnished Accessories

<b>RK183WS (Black)</b> <b>95B2064 (White)</b>	Black snap-fit foam windscreen White snap-fit foam windscreen	<b>65B1752</b>	Stand adapter (MX202B)
<b>RK202PK</b>	Preamplifier kit, plate mounted, White (MX202BP & MX202WP)	<b>RK100PK/ RK100PKW</b>	In-line preamplifier (MX202W & MX202B)
<b>80A476</b>	Clamp (MX202B & MX202WP)	<b>80B489</b>	Hang clip

## Optional Accessories and Replacement Parts

<b>A202BB</b>	Desk stand	<b>R183B (Black)</b> <b>R183W (White)</b>	Omnidirectional cartridge for all Microflex models
<b>80A479</b>	Strain relief (MX202BP & MX202WP)	<b>R184B (Black)</b> <b>R184W (White)</b>	Supercardioid cartridge for all Microflex models
<b>A57F</b>	Stativ adapter (MX202B)	<b>R185B (Black)</b> <b>R185W (White)</b>	Cardioid cartridge for all Microflex models

## Architectural Specifications

**MX202B/C** – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202B/S** – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202B/N** – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, in-line preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202W/C** – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202W/S** – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202W/N** – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, in-line preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202BP/C** – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.







**MX202BP/S** – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202BP/N** – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, a plate-mounted preamplifier, and black finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202WP/C** – The microphone shall be an electret condenser overhead microphone with a cardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.8 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202WP/S** – The microphone shall be an electret condenser overhead microphone with a supercardioid polar pattern, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

**MX202WP/N** – The microphone shall be an electret condenser overhead microphone with no included cartridge, 10 cm gooseneck, a plate-mounted preamplifier, and white finish. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The microphone shall offer the option to interchange cartridges with diverse polar pattern.

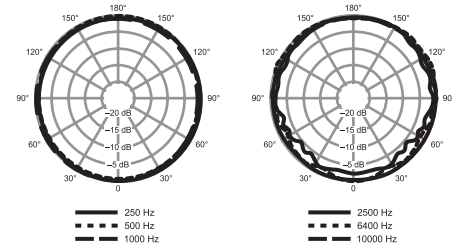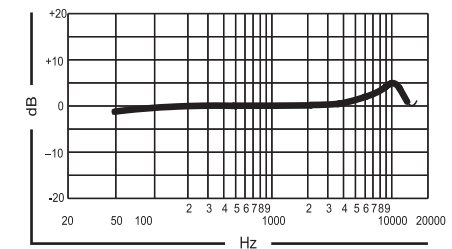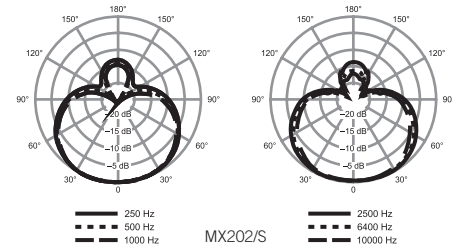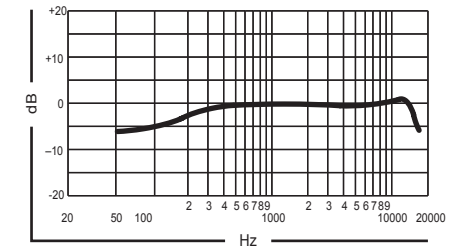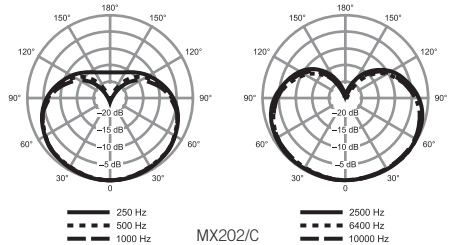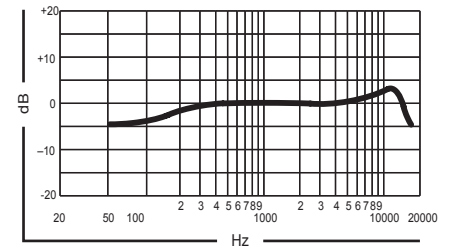


# MX391, MX392, MX393 Boundary Microphones


With slim design and superior audio reproduction, Microflex Boundary Microphones are the ideal conference room solution. Equipped with features like programmable, silent membrane switches, interchangeable cartridges, logic inputs and outputs, and LED indicators, Microflex Boundary microphones provide high-quality sound for a wide range of applications.

## Specifications

<b>Type</b>	Condenser (electret bias)	
<b>Frequency Response</b>	50 Hz – 17 kHz	
<b>Polar Pattern</b>	MX391/C, MX392/C, MX393/C: Cardioid MX391/S, MX392/S, MX393/S: Supercardioid MX391/O, MX392/O, MX393/O: Omnidirectional	
<b>Output Impedance</b>	EIA rated at 150 Ω (180 Ω actual)	
<b>Logic Connections</b> (MX392 Only)	LED IN: Active low (≤1.0 V), TTL compatible. Absolute maximum voltage: -0.7 V to 50 V. SWITCH OUT: Active low (≤0.5 V), sinks up to 20 mA, TTL compatible. Absolute maximum voltage: -0.7 V to 50 V (up to 50 V through 3 kΩ).	
<b>Environmental Conditions</b>	Operating temperature range: -18° C – 57° C Relative Humidity: 0 – 95%	
<b>Power Requirements</b>	11 – 52 Vdc phantom, 2.0 mA	
	<b>MX391</b>	<b>MX392/MX393</b>
<b>Sensitivity</b> (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL); All settings -12 dB at 0 gain (internal modification)	Cardioid -29.5 dB (33.5 mV) Supercardioid -28.3 dB (38.5 mV) Omnidirectional -21.8 dB (81.4 mV)	Cardioid: -27.5 dBV/Pa (42.2 mV) Supercardioid: -26.5 dBV/Pa (47.3 mV) Omnidirectional: -22.0 dBV/Pa (79.4 mV)
<b>Maximum SPL</b> 1 kHz at 1% THD, 1 kΩ load; All settings +6 dB at 0 gain (internal modification)	Cardioid: 118.8 dB Supercardioid: 117.5 dB Omnidirectional: 110.7 dB	Cardioid: 117.0 dB Supercardioid: 116.0 dB Omnidirectional: 111.5 dB
<b>Equivalent Output Noise A-weighted</b>	Cardioid: 22.6 dB SPL Supercardioid: 21.3 dB SPL Omnidirectional: 14.5 dB SPL	Cardioid: 23.0 dB Supercardioid: 22.0 dB Omnidirectional: 17.5 dB
<b>Signal-to-Noise Ratio</b> referenced at 94 dB SPL at 1 kHz	Cardioid: 71.4 dB Supercardioid: 72.7 dB Omnidirectional: 79.5 dB	Cardioid: 71.0 dB Supercardioid: 72.0 dB Omnidirectional: 76.5 dB
<b>Dynamic Range</b> 1 kΩ load at 1 kHz	96.2 dB	94.0 dB
<b>Common Mode Rejection</b> 10 Hz to 100 kHz	45 dB minimum, 10 Hz to 100 kHz	45 dB minimum, 10 Hz to 100 kHz
<b>Preamplifier Output Clipping Level</b> 1% THD	-6 dBV (0.5 V)	-6 dBV (0.5 V)
<b>Polarity</b>	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of the preamplifier XLR output	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output connector (MX393) or red wire relative to black wire (MX392).



**MX391**  
Boundary microphone

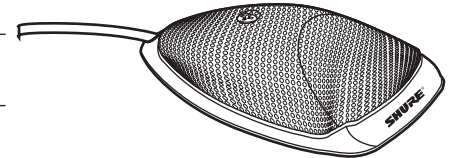

**MX392/ MX393**  
Boundary microphone

## Available Models

The polar pattern of the cartridge is indicated by the model number suffix: C = Cardioid, O = Omnidirectional, S = Supercardioid

<b>MX391/C, MX391/S, MX391/O</b>	Black surface-mount microphone, attached 3.7 m cable terminated, 4-pin mini connector, separate preamplifier
<b>MX391W/C, MX391W/S, MX391W/O</b>	White surface-mount microphone, attached 3.7 m cable terminated, 4-pin mini connector, separate preamplifier
<b>MX392/C, MX392/S, MX392/O</b>	Surface-mount microphone, programmable membrane on/off switch, logic input/output terminals, on/off indicator LED, screw terminal connections, attached 3.7 m unterminated cable
<b>MX393/C, MX393/S, MX393/O</b>	Surface-mount microphone, programmable membrane on/off switch, on/off indicator LED, miniature three pin connector, and detachable 3.7 m cable.







# MX391, MX392, MX393 Boundary Microphones

## Furnished Accessories

<b>95B2313</b>	Zipper bag	<b>80A541</b>	Switch paint mask (MX392/MX393)
<b>80C514</b>	Paint mask (MX392/MX393)	<b>36A664</b>	Paint plug (MX392/MX393)
<b>RK100PK</b>	In-line preamp (MX391/MX391W)		

## Optional Accessories and Replacement Parts

<b>R183B</b>	Omnidirectional cartridge for all Microflex models	<b>C129</b>	3,7 m cable 3-pin miniature connector (TA3F) to male XLR (MX393)
<b>R184B</b>	Supercardioid cartridge for all Microflex models	<b>C130</b>	Custom-logic cable with threaded adapter
<b>R185B</b>	Cardioid cartridge for all Microflex models	<b>15A525</b>	Custom logic cable (specify length)

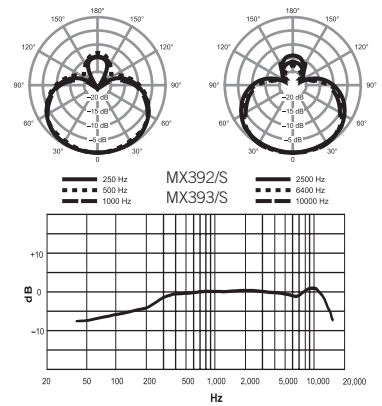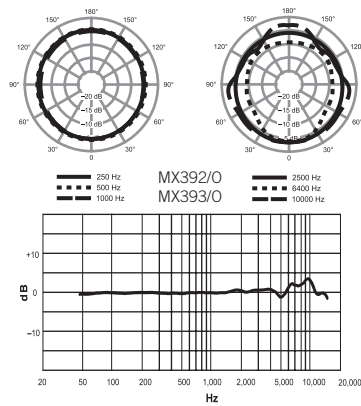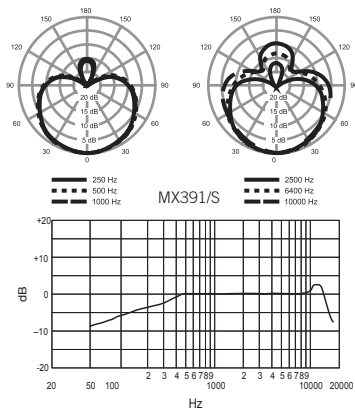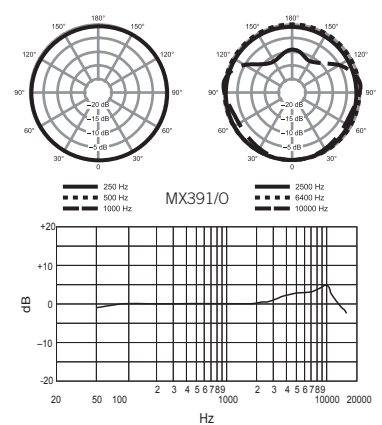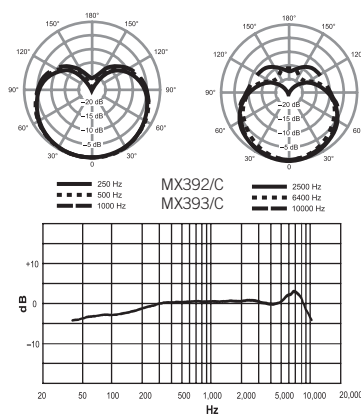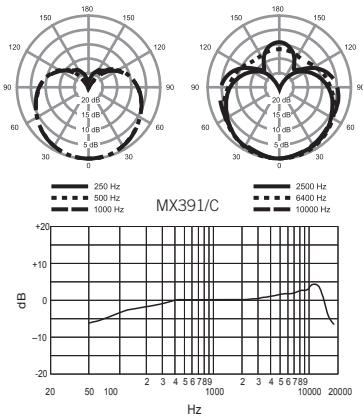

# MX391, MX392, MX393 Boundary Microphones

---

## Architectural Specifications

MX391/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 33.5 mV/Pa.

MX391/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 38.5 mV/Pa.

MX391/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 81.4 mV/Pa.

MX391W/C – The microphone shall be a surface mounted, white electret condenser microphone with a cardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 33.5 mV/Pa.

MX391W/S – The microphone shall be a surface mounted, white electret condenser microphone with a supercardioid polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 38.5 mV/Pa.

MX391W/O – The microphone shall be a surface mounted, white electret condenser microphone with an omnidirectional polar pattern, a 3.7 m cable terminated with a 4-pin mini connector, and in-line preamplifier. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 81.4 mV/Pa.

MX392/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.2 mV/Pa.

MX392/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 47.3 mV/Pa.

MX392/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, programmable membrane on/off switch, and logic controlled LED indicator. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 79.4 mV/Pa.

MX393/C – The microphone shall be a surface mounted, black electret condenser microphone with a cardioid polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m cable, connected to the microphone through a TA3F connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.2 mV/Pa.

MX393/S – The microphone shall be a surface mounted, black electret condenser microphone with a supercardioid polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m cable, connected to the microphone through a TA3F connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 47.3 mV/Pa.

MX393/O – The microphone shall be a surface mounted, black electret condenser microphone with an omnidirectional polar pattern, programmable membrane on/off switch with LED indicator. The microphone shall include a removable 3.7 m (12") cable, connected to the microphone through a TA3 connector and which terminates to a XLR connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 79.4 mV/Pa.




# MX150 Subminiature Condenser Lavalier Microphone

The Shure Microflex MX150 is a professional subminiature electret condenser lavalier microphone ideal for use in speech and other applications requiring low profile, discreet placement. Available with cardioid or omnidirectional patterns, the MX150 provides uncompromised sound quality and high reliability with minimal visibility for use in television broadcasting, corporate and educational lectures, A/V teleconferencing, and sound reinforcement.

## Features

- Available in cardioid or omnidirectional polar patterns and TQG/TA4F (for use in Shure bodypacks) or wired XLR variations
- CommShield® technology guards against interference from cellular RF devices and digital bodypack transmitters
- Matte black, sleek, low-profile, design for inconspicuous placement
- Multi-position tie clip allows for a variety of placement options and features an integrated cable management system for convenient cable dress with minimized handling noise.
- Kevlar-reinforced soft-flex cable design further reduces handling noise while providing superior flexibility for routing and placement
- User-changeable equalization caps for response shaping (omnidirectional only)
- Snap-fit, concise windscreens provides protection from plosives and wind noise with minimal visibility
- Legendary Shure quality, ruggedness, and reliability





MX150 with tie clip and windscreen

## Available Models


<b>MX150B/O-TQG</b>	Microflex subminiature condenser lavalier microphone, omnidirectional, TQG connector
<b>MX150B/C-TQG</b>	Microflex subminiature condenser lavalier microphone, cardioid, TQG connector
<b>MX150B/O-XLR</b>	Microflex subminiature condenser lavalier microphone, omnidirectional, XLR connector
<b>MX150B/C-XLR</b>	Microflex subminiature condenser lavalier microphone, cardioid, XLR connector

## Specifications

	MX150/C	MX150/O
<b>Transducer Type</b>	Electret condenser	Electret condenser
<b>Polar Pattern</b>	Cardioid	Omnidirectional
<b>Frequency Response</b>	20 – 20 kHz	20 – 20 kHz
<b>Output Impedance</b>	TQG: N/A, XLR: 165.5 Ω	TQG: N/A, XLR: 165.0 Ω
<b>Sensitivity</b> open circuit voltage, @ 1 kHz, typical	TQG: -51.0 dBV/Pa (3.0 mV) XLR: -39.0 dBV/Pa (11.0 mV)	TQG: -46.5 dBV/Pa (4.5 mV) XLR: -34.5 dBV/Pa (19.0 mV)
<b>Maximum SPL</b> 1 kHz at 1% THD, 2500 Ω Load	TQG: 147.5 dB SPL XLR: 134.5 dB SPL	TQG: 143.0 dB SPL XLR: 130 dB SPL
<b>Signal-to-Noise Ratio</b>	TQG: 57.5 dB XLR: 57.0 dB	TQG: 60.0 dB XLR: 59.5 dB
<b>Clipping Level</b> 1 kHz at 1% THD, 2500 Ω Load	TQG: 2.0 dBV XLR: 1.0 dBV	TQG: 2.0 dBV XLR: 1.0 dBV
<b>Common Mode Rejection</b> 20 Hz – 20 kHz	TQG: N/A XLR: ≥60 dB	TQG: N/A XLR: ≥60 dB
<b>Dynamic Range</b> @ 1 kHz, 2500 Ω Load	TQG: 111.0 dB SPL XLR: 97.5 dB SPL	TQG: 109.0 dB SPL XLR: 95.5 dB SPL
<b>Self Noise</b> equivalent SPL, A-weighted, typical	TQG: 36.5 dB XLR: 37.0 dB	TQG: 34.0 dB XLR: 34.5 dB
<b>Operating Temperature Range</b>	-18°C to 57°C	-18°C to 57°C
<b>Polarity</b>	TQG: Positive pressure on diaphragm produces positive voltage on pin 3 with respect to pin 1 XLR: Positive pressure on diaphragm produces positive voltage on pin 2 with respect to pin 3	
<b>Power Requirements</b>	TQG: 5 V DC (0.04 – 0.18 mA) XLR: 11-52 V DC phantom power (IEC-61938), < 2.2 mA	TQG: 5 V DC (0.04 – 0.18 mA) XLR: 11-52 V DC phantom power (IEC-61938), < 2.2 mA
<b>Cable Length</b>	1.52 m	1.52 m
<b>Weight</b>	TQG: 21 g XLR: 121 g	TQG: 21 g XLR: 121 g




MX150/C Polar Pattern




MX150/O Polar Pattern

## Accessories

<b>WA150</b>	Storage pouch for MX150
<b>WA330</b>	TQG/TA4F 4 pin connector
<b>RK100PK</b>	XLR preamp

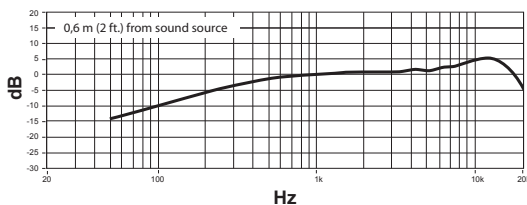

MX150/C Frequency Response

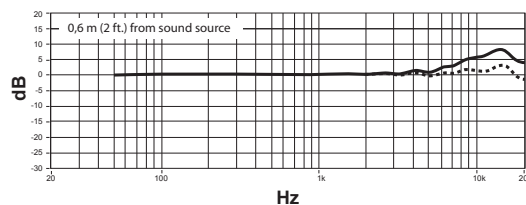

MX150/O Frequency Response

Boost Cap  
Normal Cap

# MX153 Earset Headworn Microphone

The Shure Microflex MX153 is a professional subminiature earset microphone ideal for speech and other applications requiring low-profile discreet placement where improved gain before feedback over lavalier microphones is desired. Delivering exceptional speech clarity, the MX153 is ideal for corporate and educational presentations, A/V conferencing and live sound reinforcement. Available in three color options and direct TA4F connectivity to Shure bodypacks, the MX153 provides outstanding clarity in an extremely comfortable, over the ear design.

## Features


- Subminiature, omnidirectional cartridge offers superior speech clarity and enhanced plosive protection with no proximity effect
- Terminated with TQG/TA4F connector for direct connectivity to Shure wireless bodypack transmitters
- Ultra-lightweight, comfortable, flexible design is stable and easy to place over either ear
- CommShield® technology guards against interference from cellular RF devices and digital bodypack transmitters
- Kevlar reinforced, attached soft-flex cable
- Matte black, tan, and cocoa color options available
- Includes protective storage pouch, 3 windscreens, and collar clip

## Available Models

<b>MX153B/O-TQG</b>	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, black
<b>MX153T/O-TQG</b>	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, tan
<b>MX153C/O-TQG</b>	Microflex earset headworn condenser microphone, omnidirectional, TQG connector, cocoa

## Specifications


	<b>MX153</b>
<b>Transducer Type</b>	Electret condenser
<b>Polar Pattern</b>	Omnidirectional
<b>Frequency Response</b>	20 Hz – 20 kHz
<b>Output Impedance</b>	N/A
<b>Sensitivity</b> open circuit voltage, @ 1 kHz, typical	–41 dBV/Pa (9 mV)
<b>Maximum SPL</b> 1 kHz at 1% THD	2500 Ω load: 107 dB SPL 1000 Ω load: 107 dB SPL
<b>Signal-to-Noise Ratio</b>	60 dB
<b>Dynamic Range</b> @ 1 kHz	2500 Ω load: 73 dB 1000 Ω load: 73 dB
<b>Common Mode Rejection</b> 20 Hz – 20 kHz	N/A
<b>Self Noise</b> equivalent SPL, A-weighted, typical	34 dB
<b>Operating Temperature Range</b>	–18°C – 57°C
<b>Polarity</b>	Positive pressure on diaphragm produces negative voltage on pin 3 with respect to pin 1
<b>Power Requirements</b>	+1-5 V DC (500 µA maximum)
<b>Weight</b>	19.8 g

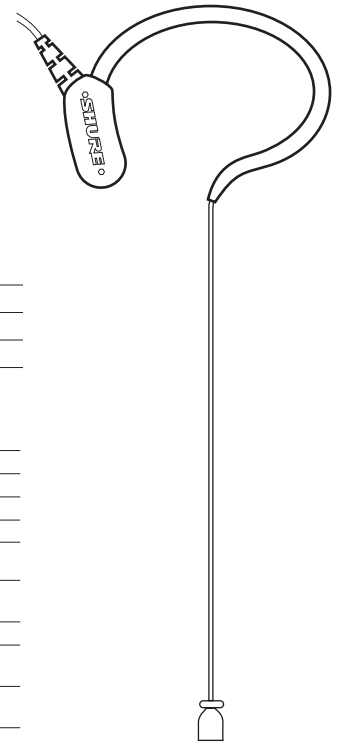

MX153 Earset  
Headworn Microphone

## Accessories

<b>WA150</b>	Storage pouch for MX150
<b>WA330</b>	TQG/TA4F 4 pin connector
<b>RK100PK</b>	XLR preamp

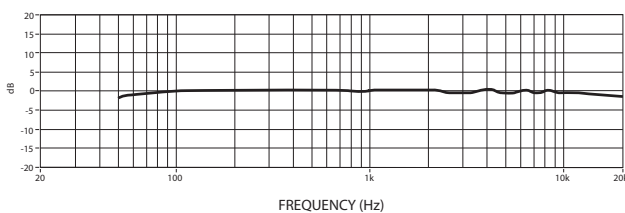


# MX183, MX184, MX185 Lavalier Microphones

Attached to a tie or lapel, Microflex Lavalier Microphones offer freedom of movement to any situation involving voice reproduction. As stylish as they are convenient, Lavaliers are available in different directional patterns, come with multiple clip options, and are compatible with all Shure wireless platforms.

## Specifications

<b>Type</b>	Condenser (electret bias)
<b>Frequency Response</b>	50 Hz – 17 kHz
<b>Polar Pattern</b>	MX183: Omnidirectional MX184: Supercardioid MX185: Cardioid
<b>Output Impedance</b>	EIA rated at 150 $\Omega$ (170 $\Omega$ actual)
<b>Sensitivity</b> (at 1 kHz, open circuit voltage; 1 Pascal = 94 dB SPL; all settings -12 dB at 0 gain)	MX183: -27.5 dB (42.2 mV) MX184: -33.5 dB (21.1 mV) MX185: -35.4 dB (17.0 mV)
<b>Maximum SPL</b> (1 kHz at 1% THD, 1 k $\Omega$ load; all settings +6 dB at 0 gain)	MX183: 116.7 dB MX184: 122.7 dB MX185: 124.2 dB
<b>Equivalent Output Noise</b> A-weighted	MX183: 20.5 dB MX184: 26.5 dB MX185: 28.0 dB
<b>Signal-to-Noise Ratio</b> referenced at 94 dB SPL at 1 kHz	MX183: 73.5 dB MX184: 67.5 dB MX185: 66.0 dB
<b>Dynamic Range</b> 1 k $\Omega$ load at 1 kHz	96.2 dB 100 dB at 0 gain (internal modification)
<b>Common Mode Rejection</b> 10 Hz to 100 kHz	45 dB minimum
<b>Polarity</b>	Positive sound pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector.
<b>Environmental Conditions</b>	Operating temperature range: -18° – 57° C Storage temperature range: -29° – 74° C
<b>Power Requirements</b>	11 – 52 Vdc phantom, 2.0 mA
<b>Cable</b>	Shielded 1.2 m cable terminated with a 4-pin female mini connector (TA4F)

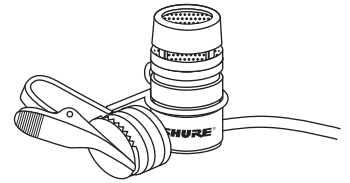

MX183/ MX184/ MX185  
Lavalier microphone

## Available Models

<b>MX183</b>	Omnidirectional, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen
<b>MX184</b>	Supercardioid, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen
<b>MX185</b>	Cardioid, includes belt-clip preamp, rotatable tie clip, dual tie clip, snap-fit windscreen

# MX183, MX184, MX185 Lavalier Microphones

## Furnished Accessories

<b>26A13</b>	Zipper bag	<b>RK183T1</b>	Tie clip
<b>RK261BWS</b>	Foam windscreen	<b>RK183T2</b>	Dual tie clip
<b>RK183WS</b>	Snap-fit windscreen	<b>RK100PK</b>	In-line preamp
<b>80A67</b>	Hex wrench #4		

## Optional Accessories and Replacement Parts







<b>R183B</b>	Omnidirectional cartridge for all Microflex models	<b>R184B</b>	Supercardioid cartridge for all Microflex models	<b>R185B</b>	Cardioid cartridge for all Microflex models
<b>MX1BP</b>	Battery powered preamp	<b>53A2133A</b>	Belt clip for in-line preamp	<b>WA333</b>	4-pin female mini connector (TA4F)
<b>C133</b>	Replacement cable, Microphone to preamp				

## Architectural Specifications

**MX183** – The microphone shall be black electret condenser lavalier microphone with an omnidirectional polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 42.4 mV/Pa.

**MX184** – The microphone shall be a black electret condenser lavalier microphone with a supercardioid polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 21.1 mV/Pa.

**MX185** – The microphone shall be a black electret condenser lavalier microphone with a cardioid polar pattern, in-line belt-clip preamp, and 1.2 m cable that terminates with a 4-pin miniature (TA4F) connector. The microphone shall be resistant to RF interference from portable mobile and handheld devices. The frequency response shall be 50 Hz to 17 kHz and the sensitivity shall be 17.0 mV/Pa.

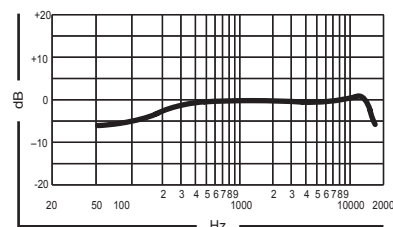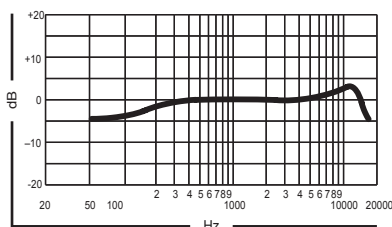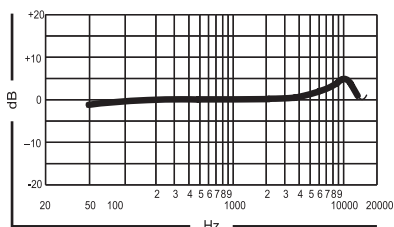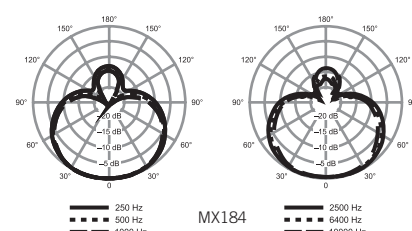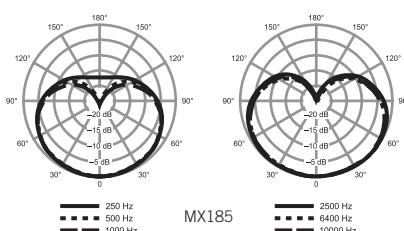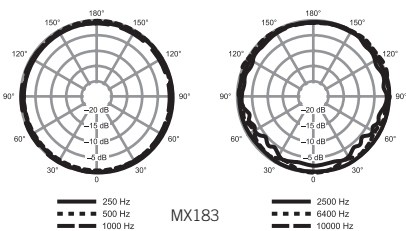

**SHURE**<sup>®</sup>  
LEGENDARY  
PERFORMANCE™

Europe, Middle East, Africa:  
Shure Europe GmbH  
Jakob-Dieffenbacher-Str. 12,  
75031 Eppingen, Germany

Phone: +49-7262-92490  
Fax: +49-7262-9249114  
Email: [info@shure.de](mailto:info@shure.de)  
[www.shure.eu](http://www.shure.eu)