

Specifications




2X1 SPLIT

Passive 2X1 RF Signal Splitter/Combiner,
BNC female connectors

The 2x1SPLIT is intended for use with wireless audio systems and is compatible with all major brand wireless microphones and in-ear monitors.

Features:

One BNC antenna in and two BNC out, or two BNC antennas in and one BNC out. R1 channel passes 12V DC if DC over coax is provided.

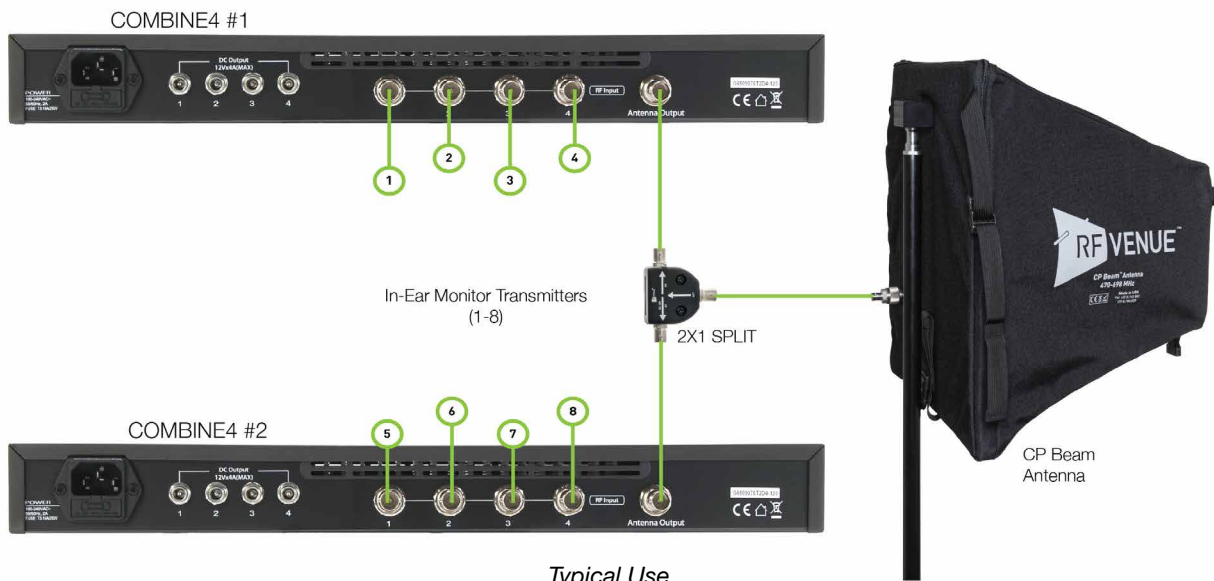

Electrical

RF Carrier Frequency Range..... 10-1,000 MHz
 VSWR 1:2
 Impedance 50Ω
 Isolation 20 dB
 Insertion Loss 2 dB
 Max power into ANT input..... 30 dBm
 Max power to each of R1 & R2..... 26 dBm
 Power requirements..... 12V DC, 100ma

Physical

Dimensions..... 72.2x54.9x23.6 mm
 Weight..... 62.6g