



Specifications

Cable Cubby® 500, 700, and 500 CCB

Switch contact closure – Cable Cubby 500 CCB only

Quantity/type	(3) momentary single pole, double throw switch
Connectors	(3) 5 pole, 3.5 mm captive screw connector on 4" pigtail
Contact rating	1 A @ 24 VDC/125 VAC
LED voltage input.....	5 VDC
LED color	Blue

NOTE: Each switch can be used to select an input on a connected switcher with contact closure ports. See the Cable Cubby 500 and 700 Installation Guide for details.

General

Enclosure dimensions

Cable Cubby 500

Top plate (outer rim)	6.38" W x 6.38" D (162 mm W x 162 mm D)
Surface cutout (inside rim)..	5.75" W x 5.75" D (146 mm W x 146 mm D)
Enclosure depth.....	6.46" H (164 mm H)


Cable Cubby 700

Top plate (outer rim)	7.79" W x 6.38" D (198 mm W x 162 mm D)
Surface cutout (inside rim)..	7.13" W x 5.75" D (181 mm W x 146 mm D)
Enclosure depth.....	6.46" H (164 mm H)

Cable Cubby 500 CCB

Top plate (outer rim)	6.38" W x 7.79" D (162 mm W x 198 mm D)
Surface cutout (inside rim)..	5.75" W x 7.13" D (146 mm W x 181 mm D)
Enclosure depth.....	6.46" H (164 mm H)

Specification • Cable Cubby® 500, 700, and 500 CCB (Continued)

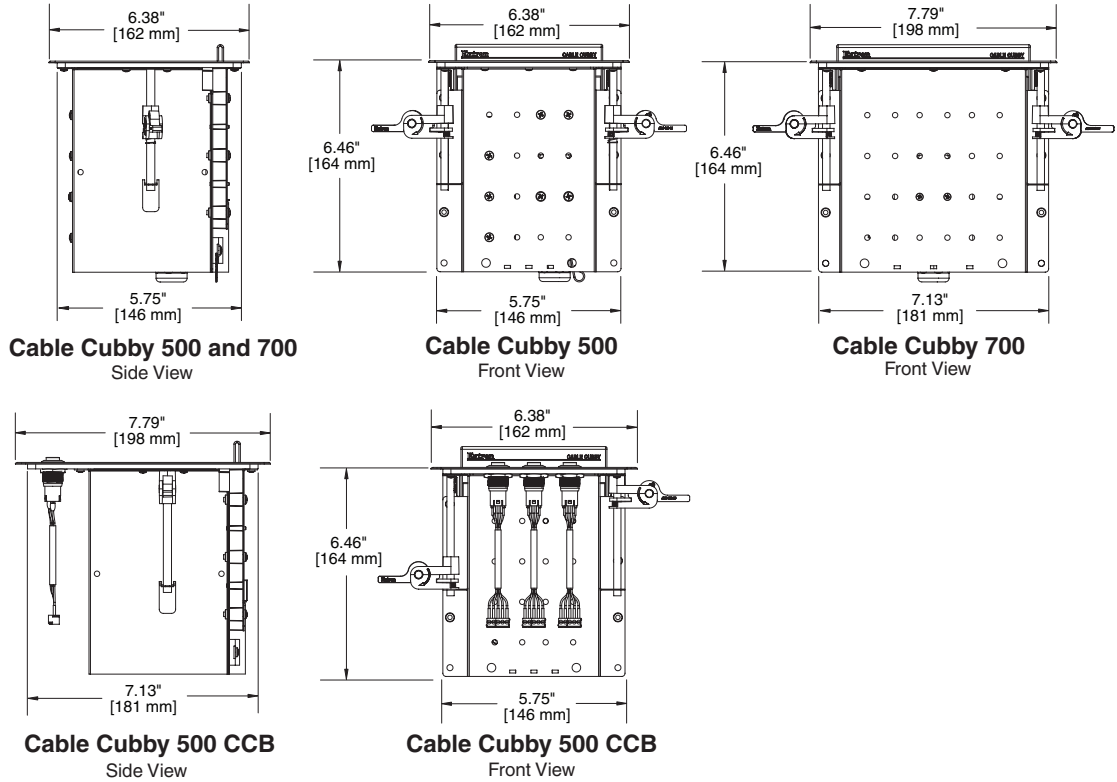

Power supply (optional)	
US AC module	125 VAC, 50-60 Hz, 12 A max total
Mounting	Furniture mount
Min./max. table thickness	0.50" to 2.50" (13 mm to 63 mm)
Enclosure type	Metal
Product weight	
Cable Cubby 500	
Enclosure only	2.2 lbs (1.0 kg)
With AC module	3.8 lbs (1.7 kg)
Cable Cubby 700	
Enclosure only	2.5 lbs (1.1 kg)
With AC module	4.2 lbs (1.9 kg)
Cable Cubby 500 CCB.....	2.5 lbs (1.1 kg)
Regulatory compliance.....	CE, RoHS, WEEE
US configuration*	UL, c-UL
Warranty	3 years parts and labor

NOTE: *The UL listing is only valid when the Cable Cubby contains the US AC power module.

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.