


# DOUBLE CORE SPEAKER CABLES

## CVS LK02N\*\*E

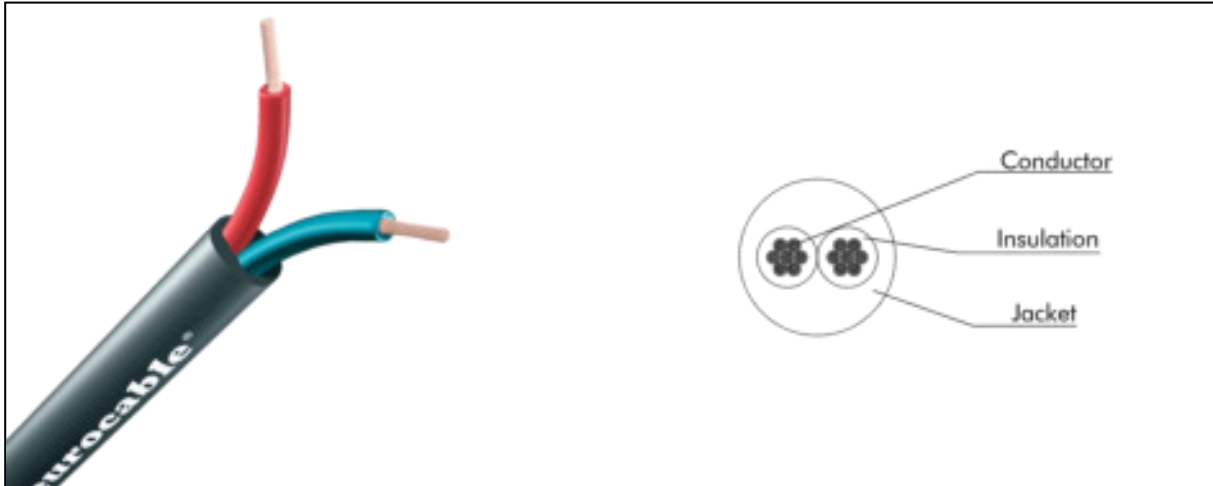

		CVS LK02N15E	CVS LK02N25E
<b>ELECTRICAL DATA</b>			
Rated voltage		300/300V	
D.C.R. at 20°		13.3 ohm/km	7.98 ohm/km
Capacitance		110 pF/m	
<b>GENERAL DATA</b>			
Cable	O.D.	7.40 mm(± 0.2 mm)	8.60 mm(± 0.2 mm)
	Standard reels	100 m	
	Bending radius	10 x O.D.	
	Operating temperature	-20°C/+70°C	
Jacket	Material	PVC TM2	
	Color	Black	
Conductor	Quantity	2	
	Area	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
	Strand	48 x 0.193 mm	80 x 0.193 mm
	Insulation material	PVC TI2	
	Insulation O.D.	2.8 mm	3.4 mm
	Insulation thickness	≥ 0.6 mm	> 0.7 mm
	Insulation color	Blue/Red	
	Material	Elettrolitic bare copper	