


WIRING CABLE ALUMINIUM SHIELD 03.1 MM

CVS LK02N2A

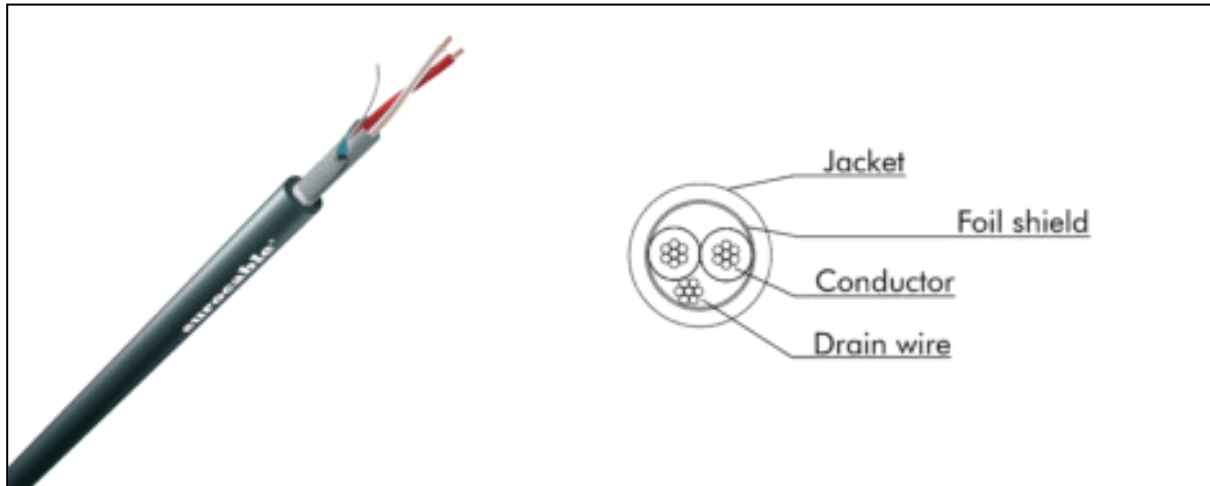

CVS LK02N2A		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	65 ohm/km
	Shield	260 ohm/km
Capacitance	Conductor/Conductor 1 KHz	100 pF/m
	Conductor/Shield 1 KHz	300 pF/m
Nominal Impedance 1 KHz		600 ohm/100m
Attenuation 1 KHz		0.50 db/100m
Inductance		<58 µH/100m
GENERAL DATA		
Cable	O.D.	3.10 mm
	Standard reels	200 m
	Weight Kg/100m	1.40
	Operating temperature	-35°C/+65°C
Jacket	Material	PVC
	Nominal Thickness	0.30 mm
Shield	Material	Aluminium - Polyester tape
	Coverage	100%
Conductor	Qty	2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm ² /24
	Insul. O.D.	1.00 mm
	Material	Bare copper polyethylene insulated