


DOUBLE CORE SPEAKER CABLES FLAME RESISTANT

CVS LK02N15

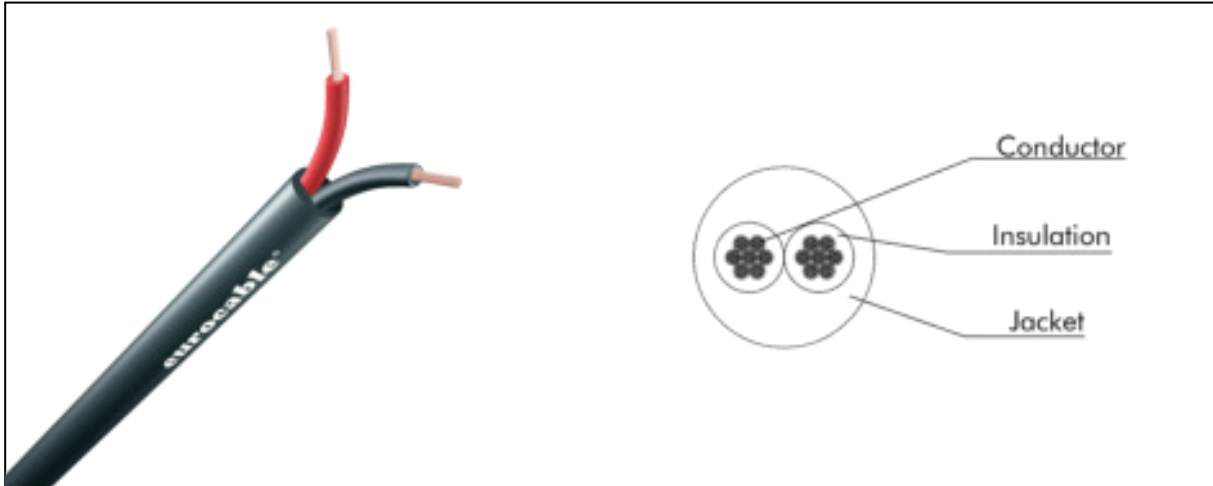

CVS LKCode		02N15	02N25	02N40
GENERAL DATA				
Cable	O.D.	8.00 mm	9.20 mm	11.50 mm
	Standard reels	100 m		
	Weight Kg/100m	9.60	14.30	20.50
	Operating temperature	+5°C/+70°C		
Jacket	Material	PVC flame resistant		
	Nominal Thickness	1.20 mm	1.00 mm	1.50 mm
Conductor	D.C.R. [ohm/km] at 20° C	13	8	5
	Quantity, strand	2 x 48 x 0.2	2 x 80 x 0.2	2 x 128 x 0.2
	Area/AWG	1.5 mm ² /16	2.5 mm ² /13	4.0 mm ² /11
	Insul. O.D.	2.8 mm	3.4 mm	4.0 mm
	Material	Bare copper fire resistant PVC insulated		