


MICROPHONE CABLES

CVS LK02*6E

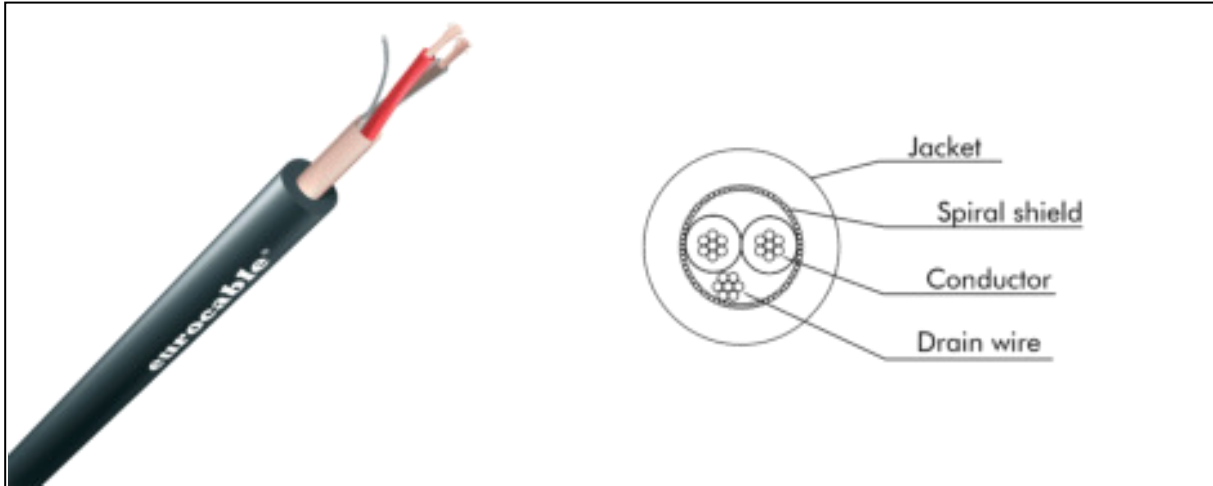

CVS LKCode		02N6E	02B6E	02G6E	02R6E	02V6E	02Y6E	
ELECTRICAL DATA								
D.C.R. at 20°C	Conductor							≤ 78 ohm/km
	Shield							≤ 39 ohm/km
Capacitance	Conductor/Conductor 1 KHz							160 pF/m
	Conduc-tor/Shield	1 KHz						80 pF/m
Nominal Impedance		1 KHz						600 ohm/100m
Attenuation		1 KHz						0.50 db/100m
Inductance								< 58 μH/100 m
Vel. of Prop.								-
GENERAL DATA								
Cable	O.D.							6.00 mm
	Standard reels							100 m
	Weight Kg/100m							4,60
	Operating temperature							-5°C/+70°C
Jacket	Material							PVC
	Color		Black	Blue	Grey	Red	Green	Yellow
	Nominal Thickness							1.80 mm
Shield	Material							Bare copper, Spiral shield plus 20 AWG tinned copper drain wire
	Coverage							100%
Conductor	Qty							2
	Strand							30 x 0.10 mm
	Area/AWG							0.22 mm ² /24
	Insul. O.D.							1.10 mm
	Material							Bare copper polyethylene insulated