

DATA SHEET

EASYCONNECT

TABLETOP CABLE MANAGEMENT AND CONTROL SOLUTION



2 power connection model



1 power connection + control pad model*

EasyConnect is a cable management solution installed in a table designed to eliminate common challenges of essential cables that are missing or too short, or power outlets not available or conveniently located. EasyConnect offers the secondary benefit of well-ordered cable management, where the cables are neatly routed instead of trailing across the floor. It can be configured in various combinations of power options with or without control pads. Having a control pad installed in the table makes controlling the AV equipment a faster and more efficient process.

FEATURES

- Configurable: supports one power connection and one control pad, or two power connections
- Sliding cover with cable pass-through
- 6 foot (1.7 m) cables pull out and retract easily for storage
- Included cables: HDMI, VGA, 3.5 mm audio, USB-A, 2X CAT5
- AC power connector options: EU, Universal, CH, or DK
- Supports the following control pads: Impera Sierra II, Impera Echo, Impera Echo Plus, and Impera Oscar
- Direct-out 12V DC power supply
- Covered by Biamp Systems' five-year warranty

ARCHITECTS & ENGINEERS SPECIFICATIONS


The cable management solution shall be installed into the top of a table. The cable management solution shall be equipped with the following types and quantities of cables: one HDMI cable, one VGA cable, one 3.5 mm audio cable, one USB 2.0 Type A cable, and two Category 5 cables. The cables shall be 6 feet (1.7m) in length and shall be retractable. The cable management solution shall support the following types of AC power connections: EU (Europe), Universal, CH (Switzerland), and DK (Denmark). The cable management solution shall support one or two AC power connections. Any combination of AC power connection types shall be supported for the two connection variant. The cable management solution shall support the following control pads in the one connection variant: Impera Sierra II, Impera Echo, Impera Echo Plus, and Impera Oscar. The cable management solution shall support 12V DC direct output power. Warranty shall be five years. The cable management solution shall be Biamp® EasyConnect.

* Control pad control sold separately

EASYCONNECT SPECIFICATIONS

Top Plate Dimensions		Environmental	
Width:	9.9 inches (251 mm)	Ambient Operating Temperature Range:	32 - 86° F (0 - 30° C)
Depth:	5.3 inches (135 mm)	Humidity:	10-90% relative humidity (non-condensing)
Overall Dimensions		Altitude:	0-6,600 ft (0-2000m) MSL
Height:	4 inches (102 mm)	Compliance:	
Width:	8.6 inches (218 mm)	CE Marked (Europe)	
Depth:	3.5 inches (89 mm)	RoHS Directive (Europe)	
Weight:	5.5 lbs (2.5 kg)		

INCLUDED CABLES

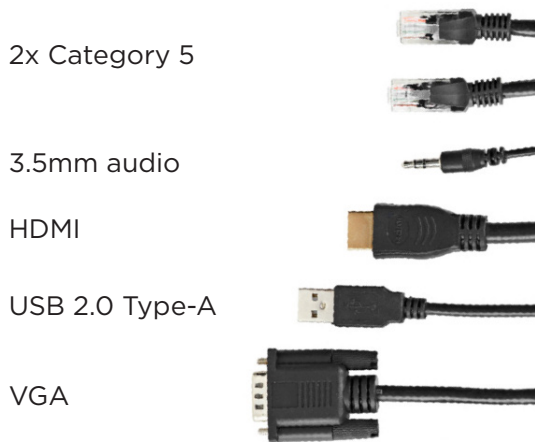


POWER CONNECTOR OPTIONS



EU socket



Universal socket



DK socket



CH socket

EASYCONNECT MODELS

EC-P-EU	2x Power Sockets (EU)
EC-P-DK	2x Power Sockets (DK)
EC-P-UNI	2x Power Sockets (UNI)
EC-P-CH	2x Power Sockets (CH)
EC-PKP-EU	Power (EU) + Control Pad*
EC-PKP-DK	Power (DK) + Control Pad*
EC-PKP-UNI	Power (UNI) + Control Pad*
EC-PKP-CH	Power (CH) + Control Pad*


CONTROL PAD OPTIONS*



Echo



Echo Plus



Oscar



Sierra II

* Control pad sold separately. See control pad data sheet for specifications.

Biamp and Impera are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.