

# MASK2-BL

2.5" compact design loudspeaker,  
black



The MASK2 satellite low impedance loudspeaker offers a combination of design and great sound. With its 2.5" paper cone woofer, MASK2 is one of the smallest loudspeakers on the market and allows easy integration into every interior without compromising on sound quality. MASK2 and SUBLIME can be installed in a shop or bar where a loudspeaker is needed that creates an inviting atmosphere but also for residential projects where you need to install a sound system which does not take over the room.

Special brackets are supplied with the speakers allowing them to be mounted under various angles in corners or on solid surfaces such as walls or ceilings.

In combination with the compact dual coil SUBLIME subwoofer, these loudspeakers are the perfect audio solution for use in small to medium sized rooms or shops as well as for residential projects.


## TECHNICAL SPECIFICATIONS

|  |                            |                                      |               |
|--|----------------------------|--------------------------------------|---------------|
| height in mm                               | 94                         | width in mm                          | 82            |
| depth in mm                                | 108                        | loudspeaker system                   | full range    |
| woofer size in inch                        | 2.5                        | woofer cone material                 | paper         |
| mounting system                            | turn / tilt bracket        | colour                               | black / white |
| impedance (ohms)                           | 8                          | low impedance dynamic power in watts | 50            |
| low impedance RMS power in watts           | 35                         | SPL 1W/1m in dB                      | 87            |
| max SPL 1m in dB                           | 98                         | frequency response in Hz             | 120 - 20K     |
| main construction material                 | ABS plastic                | grille main material                 | cloth         |
| IP rating                                  |                            | Vertical dispersion angle 1000 Hz    | 180°          |
| closest RAL colour (subject to deviations) | RAL9016 (W) / RAL9011 (BL) | Net weight product (kg)              | 0.48          |

## POLAR PLOTS


Data Shown: MASK2 (Apart Audio)  
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
Vertical

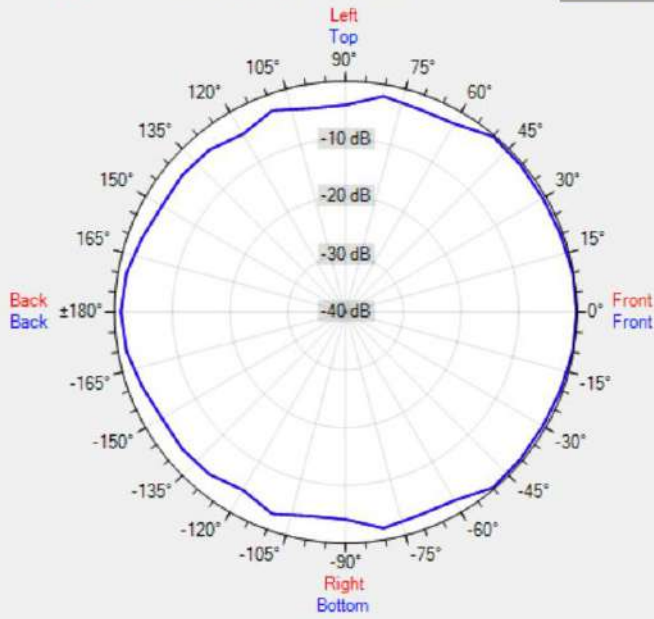


Data Shown: MASK2 (Apart Audio)  
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
Vertical

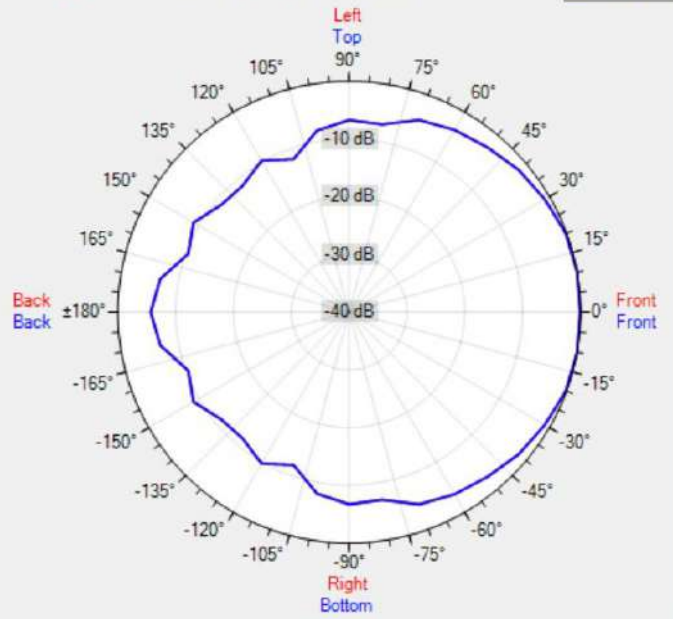


Data Shown: MASK2 (Apart Audio)  
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
Vertical

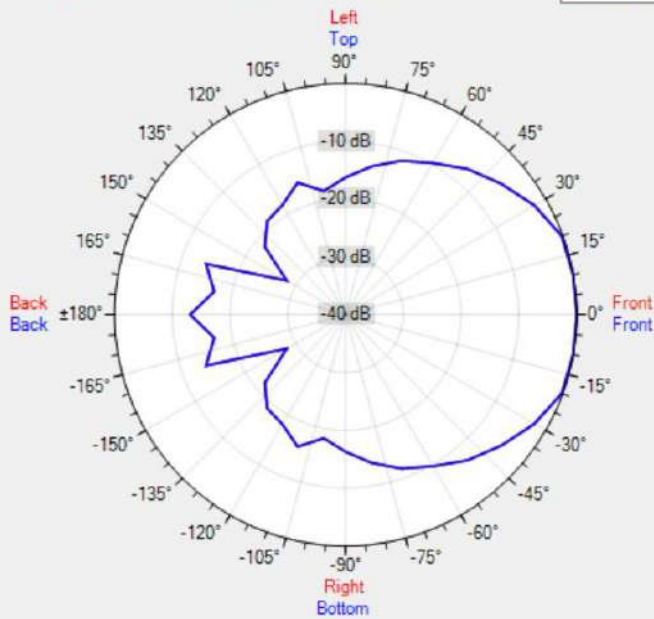

Data Shown: MASK2 (Apart Audio)  
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
Vertical

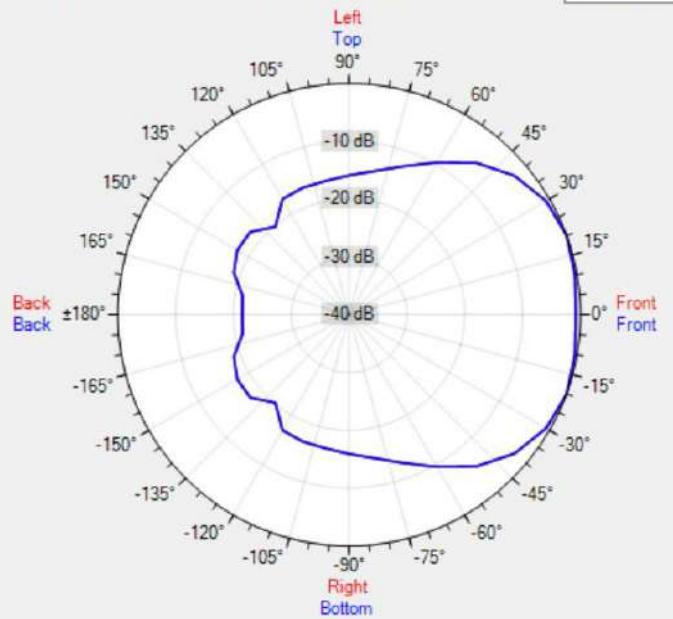

MORE PICTURES



**ACCESSORIES****MASK2CMT-BL**

Ceiling mounting tool for MASK2-BL