


MULTICORE SPEAKER CABLES

CVS LK**N**

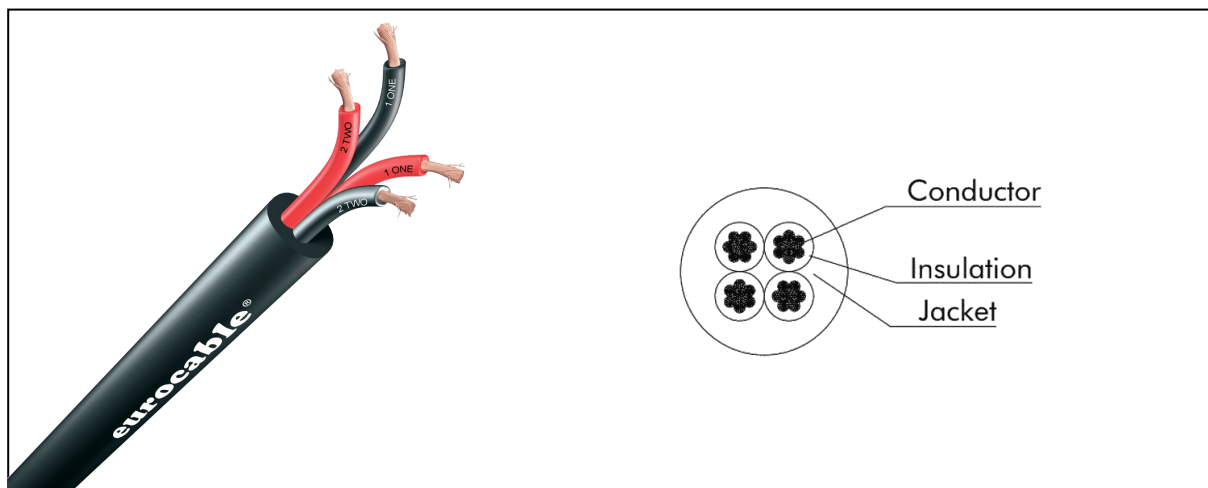

CVS LKCode		04N25	04N40	06N25	06N40	08N25	08N40	18N40	24N40*	
GENERAL DATA										
Cable	O.D.	11.10 mm	13.20 mm	14.20 mm	15.50 mm	16.00 mm	19.50 mm	22.80 mm	26.80 mm	
	Standard reels	200 m						200 m	200 m	
	Weight	Kg/100m	21.50	34.50	35.00	47.60	47	65.50	106.00	140
	Operating temperature		5°C/+70°C						-15°C/+80°C	5°C/+70°C
Jacket	Material	PVC fire resistant								
	Nominal Thickness	≥ 1.20 mm	≥ 1.80 mm	≥ 1.60 mm	≥ 1.50 mm	≥ 1.60 mm	≥ 1.80 mm	2.00 mm	2.20 mm	
Conductor	D.C.R. [ohm/km] at 20° C	8	5	8	5	8	5			
	Quantity	4		6		8		18	24	
	Strand	80 x 0.2 mm	128 x 0.2 mm	80 x 0.2 mm	128 x 0.2 mm	80 x 0.2 mm	128 x 0.2 mm			
	Area/AWG	2.50 mm ² /13	4.00 mm ² /11	2.50 mm ² /13	4.00 mm ² /11	2.50 mm ² /13	4.00 mm ² /11			
	Insul. O.D.	3.4	4.0	3.4	4.0	3.4	4.0	3.8	3.6	
	Material	PVC fire resistant						Annealed bare copper PVC flame resistant insulated		

* on request