

# TLP Pro 725T

7" TABLETOP  
TOUCHLINK PRO TOUCHPANEL



- ▶ 7" capacitive touchscreen with 1024x600 resolution and 24-bit color depth
- ▶ Newly designed inside and out for the ultimate balance of performance and style
- ▶ Tough, scratch and smudge-resistant screen
- ▶ Faster, quad-core processor
- ▶ Eight times more memory
- ▶ Compatible with all IP Link Pro control processors
- ▶ Power over Ethernet provides power and communication over a single Ethernet cable
- ▶ Built-in speaker
- ▶ Light sensor adjusts screen brightness as the ambient room lighting changes
- ▶ Configurable red and green status lights indicate a room's availability or call status

The Extron TLP Pro 725T is a 7" Tabletop TouchLink® Pro Touchpanel with many enhanced features. This latest touchpanel has been redesigned inside and out with a new quad-core processor, eight times more memory, a higher resolution, 1024 x 600 capacitive touchscreen with scratch and smudge-resistant Corning® Gorilla Glass®, and a distinctive enclosure with a sleek, gracefully-sweeping back. The TLP Pro 725T is ideal for any AV system application requiring complete, interactive control of conferencing systems, displays, switchers, and source devices.



**Extron Electronics**  
INTERFACING, SWITCHING AND CONTROL


## DESCRIPTION

The **TLP Pro 725T** is a 7" tabletop touchscreen that offers stellar performance and superior design. Inside the TLP Pro 725T there's a powerful new quad-core processor and eight times more memory feeding the high resolution 1024 x 600 capacitive touchscreen. The touchscreen, itself, is our most durable yet - built with scratch and smudge-resistant Corning Gorilla Glass. Outside you'll find a stylish, ergonomic enclosure that will complement any contemporary presentation environment.

A host of familiar features provides elegant, simple operation, while PoE, Power over Ethernet streamlines integration by allowing the touchpanel to receive power and communication over a single Ethernet cable.

All TouchLink Pro touchpanels can be customized using Extron GUI Designer software. This powerful interface design software offers ready-to-use templates for a wide variety of rooms and presentation environments.

## APPLICATION DIAGRAM

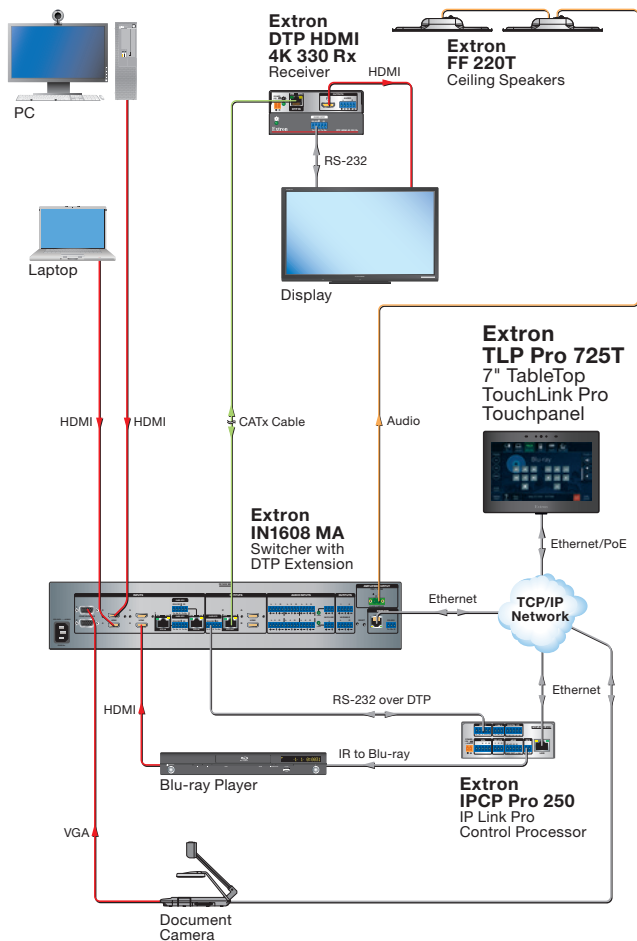

## SPECIFICATIONS

| DISPLAY                                      |   |                    |
|--|---|--------------------|
| Screen type                                  | TFT Active matrix color LCD display   |                    |
| Size   | 7" (17.8 cm), measured diagonally   |                    |
| Resolution                                   | 1024x600  |                    |
| Aspect ratio                                 | Widescreen  |                    |
| Color depth                                  | 24 bit, 16.7 million colors   |                    |
| Contrast                                     | 700:1   |                    |
| MEMORY                                       |   |                    |
| SDRAM  | 2 GB  |                    |
| Flash  | 4 GB  |                    |
| COMMUNICATION – ETHERNET INTERFACE           |   |                    |
| Ethernet data rate                           | 10/100/1000Base-T, half/full duplex with autodetect   |                    |
| Ethernet protocol                            | DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP   |                    |
| <b>Software</b>                              |   |                    |
| Configuration software                       | Global Configurator Plus and Professional, GUI Designer   |                    |
| Programming software                         | Global Scriptor   |                    |
| Control apps                                 | Extron Control, iGVE  |                    |
| Resource management software                 | GlobalViewer Enterprise, iGVE   |                    |
| Utilities                                    | Toolbelt, Embedded web page   |                    |
| CONTROL – USB                                |   |                    |
| Number/signal type                           | 1 high-speed USB 2.0 device   |                    |
| USB standards                                | USB 2.0, USB 1.1, USB 1.0 compatible  |                    |
| AUDIO OUTPUT                                 |   |                    |
| Speaker output                               | 1 mono, 86 dB SPL, 0.1 watt, 0.1 m, half space  |                    |
| <b>Playback format(s)</b>                    |   |                    |
| Container format                             | WAV (Microsoft RIFF)  |                    |
| Encoding                                     | LPCM (uncompressed)   |                    |
| Audio channels                               | mono or stereo  |                    |
| GENERAL                                      |   |                    |
| Power input requirements                     | Power over Ethernet (PoE 802.3af, class 3)  |                    |
| Temperature/humidity                         | Storage: -4 to +158 °F (-20 to +70 °C) / 5% to 90%, noncondensing<br>Operating: -4 to +158 °F (-20 to +70 °C) / 20% to 90%, noncondensing |                    |
| Mounting                                     | Set on tabletop   |                    |
| Enclosure dimensions                         | 4.78" H* x 7.12" W x 3.53" D<br>(12.15 cm H* x 18.09 cm W x 8.98 cm D)  |                    |
| <b>Regulatory compliance</b>                 |   |                    |
| Safety                                       | CE, c-UL, UL  |                    |
| EMI/EMC                                      | CE, C-tick, FCC Class B, ICES, VCCI   |                    |
| Environmental                                | Complies with the appropriate requirements of RoHS and WEEE.  |                    |
| Warranty                                     | 3 years parts and labor; touchpanel display and overlay components are covered for 1 year   |                    |
| <b>NOTE:</b> All nominal levels are at ±10%. |   |                    |
| <b>Model</b>                                 | <b>Version Description</b>  | <b>Part number</b> |
| TLP Pro 725T                                 | Black - Tabletop  | 60-1562-02         |
| TLP Pro 725T                                 | White - Tabletop  | 60-1562-03         |

For complete specifications, please go to [www.extron.com](http://www.extron.com)  
Specifications are subject to change without notice.

### WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London • Frankfurt  
Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne  
New Delhi • Bangalore • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

[www.extron.com](http://www.extron.com)