


UMiniIII

UMiniIII0.9 Front Maintenance LED Display Unit



Product features:

- 1) EBL+ technology: high contrast、ultimate pure black、soft displaying、Ultra-low reflectance、Ultra low touch trace、Ultra-low moiré
- 2) Ultra dazzling color, cinema grade HDR
- 3) Energy Saving: RGB Flipc-chip、Common Cathode、Black Screen Energy Saving、One Key Sleep Mode

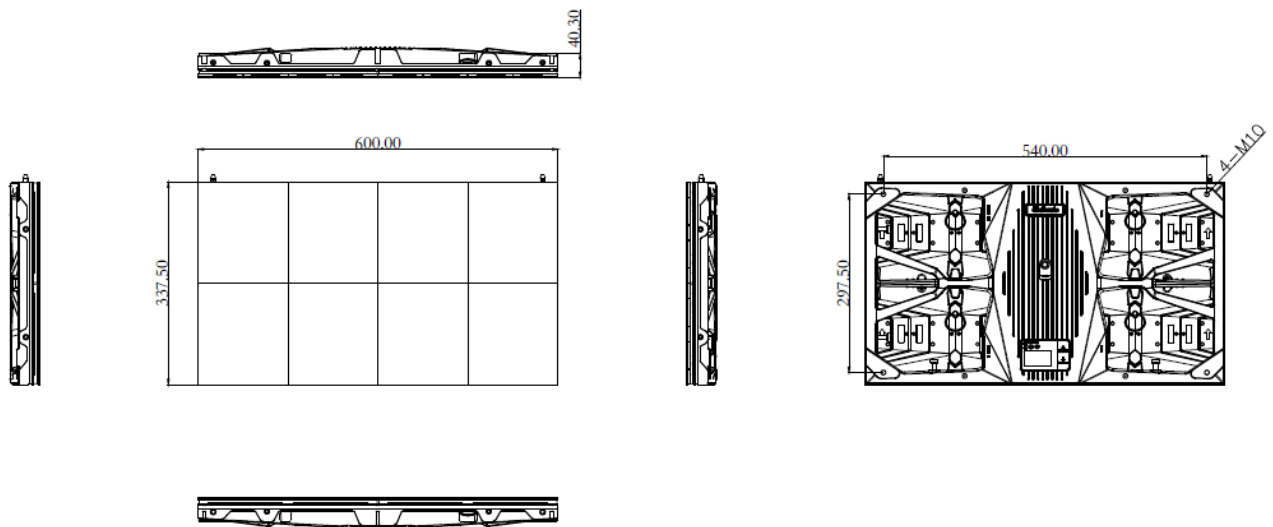

Main Technical Specifications :

Parameter	Value
Pixel Pitch	0.9375
LED Type	COB
Brightness	600cd/m ²
Pixel Density	113,7777pixels /m ²
Pixels Per Panel	640x360 pixels
Module Size	300mm×168.75mm
Panel Size	600mm×337.5mm×40mm
Weight	6kg/panel
Maintenance	Front
Ingress Protection	Rear IP50
Curve	/
Panel Diagonal	27"
Aspect Ratio	16:9
Panel Area	0.2025m ²
Planeness	≤ 0.08mm
Recommended Viewing Distance	≥ 0.9m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K-95,00K Adjustable
Viewing Angle	0° ~170°
Contrast Ratio	15000 : 1
Input Power <Max>	72 W/panel
Input Power <Typical>	24 W/panel
Input Voltage	100~240 V (50&60Hz)
Processing Depth	19bit
Refresh Rate	1920-3840 Hz
Video Frame Rate	50/60Hz
Input Power Frequency	50&60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10 ~+45 / 10~80% RH
Storage Temperature/Humidity	-20 ~+55 / 10~85% RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed
Optional Mounting Configuration	/
Certification	UL/FCC/IC/CE/CB/CCC/CQC

Note: 1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
 2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
 3. Different configurations can achieve different refresh rates.

