



ARTHUR HOLM

Drop

19" professional monitor finished in aluminium, inox or glass,
for wall integration

Ref. AH19D_A/I/G

GENERAL SPECIFICATIONS

LCD Type	19" TFT Active Matrix
Cabinet	Available with front in aluminium (A), inox (I), or glass (G). With mounting box
Controls (*)	Digital rear

DISPLAY

Brightness	250cd/m ²
Contrast ratio	800:1
Resolution (dots)	1280 (h) x 1024 (v)
Pixel	0.294 (h) x 0.294 (v) mm
Viewing angle	75°/85° (u/d) / 85°/85° (l/r)
Viewing area	376.320 (h) x 301.056 (v) mm
Life lamp	50,000 hrs

INPUTS & OUTPUTS (*)

Data input	RGB SubD 15 (1 input), DVI-D (1 input)
------------	--

ELECTRICAL

External power supply	100/240 Vac, 50/60Hz - 12Vdc, 6.67A
Power consumption	80W

MECHANICAL

Dimensions	448 x 373 x 72.4 mm [17.64"x14.69"x2.85"]
Weight	9 Kg

OTHER

Response time	Tr 1.3 ms, Tf 3.7 ms
Temperature	Operating +0°C ~ +40°C, Storage -20°C ~ +60°C

OPTIONS

PG 19 (**)	Protection glass
TS 19	SAW touch screen
PC	Intel 945GSE/ICH7 M Chipset Onboard Intel Atom N270 1.6GHz CPU One 200 pin SODIMM up to 2GB DDR2 400/533 SDRAM 2 Intel 82583V Gigabit Ethernet 2 SATA 1 CF slot 2 USB, 1 COM RS232







ARTHUR HOLM

Albiral Display Solutions SL
 Fàtima 25, Sant Hipòlit de Voltregà
 08512 Barcelona - Spain
 TEL: +34 93 850 23 76 / 23 83
 FAX: +34 93 850 25 50
 WEB: www.arthurholm.com
 E-MAIL: marketing@albiral.com

Professional 19" monitor with brushed stainless steel, aluminium or glass frame for wall integration with mounting box.

Ref. AH19DI
AH19DA
AH19DG

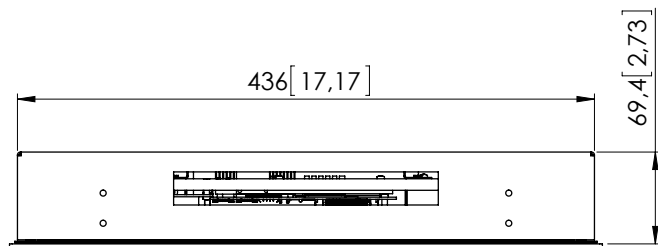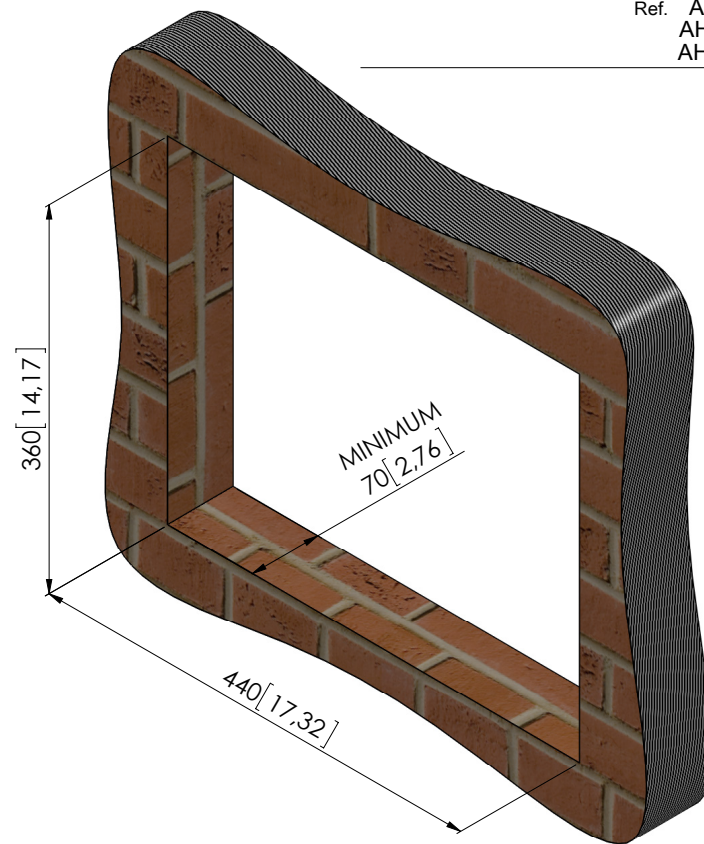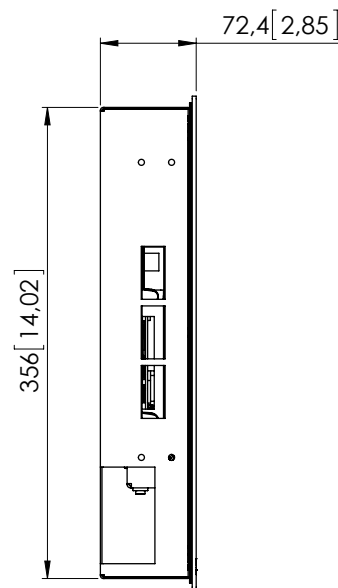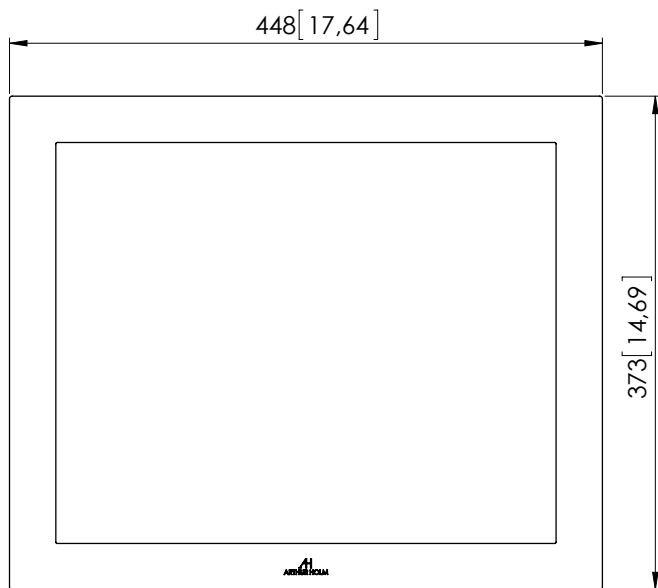

GENERAL DIMENSIONS

Scale 1:4
Dimensions in millimeters [inches]
Revision: 0
Projection: